

General Description

The LTA809x family (LTA8091, LTA8092 and LTA8094) is a new generation of high voltage (48V), low noise, precision operational amplifiers. These devices offer outstanding dc precision and ac performance, including low offset, low offset drift, 22-MHz bandwidth, and 4nV/Hz input voltage noise density at 10kHz. Unique features such as differential input-voltage range to the negative supply rail, high capacitive load drive of up to 1nF, and high slew rate (17 V/ μ s) make the LTA809x high-performance operational amplifiers for high-voltage industrial and medical applications. The robust design of the LTA809x family provides ease-of-use to the circuit designer: integrated RF/EMI rejection filter, no phase reversal in overdrive conditions, and high electro-static discharge (ESD) protection. The LTA809x are optimized for operation at voltages from +4.5V (\pm 2.25V) to +48 V (\pm 24V) over the extended temperature range of -40°C to $+125^{\circ}\text{C}$. The LTA8091 (single) is available in both SOT23-5L and SOIC-8L packages. The LTA8092 (dual) is offered in SOIC-8L, MSOP-8L and DFN3x3-8L packages. The quad-channel LTA8094 is offered in both SOIC-14L and TSSOP-14L packages.


Features and Benefits

- Wide Supply: $\pm 2.25\text{ V}$ to $\pm 24\text{ V}$, 4.5 V to 48 V
- Wide Bandwidth: 22 MHz GBW
- High Slew Rate: 17 V/ μ s
- Low Noise: 4 nV/ $\sqrt{\text{Hz}}$ at 10 kHz
- Low Offset Voltage: $\pm 350\ \mu\text{V}$ Maximum
- Low Offset Voltage Drift: $\pm 1.5\ \mu\text{V}/^{\circ}\text{C}$
- High Common-Mode Rejection: 115 dB
- Low Bias Current: 10 pA
- EMI/RFI Filtered Inputs

Applications

- High-Side and Low-Side Current Sensing
- Audio Preamplifier
- High Precision Comparator
- Multiplexed Data-Acquisition Systems
- High-Resolution ADC Driver Amplifiers
- SAR ADC Reference Buffers
- Test and Measurement Equipment
- Programmable Logic Controllers

Pin Configuration (Top View)

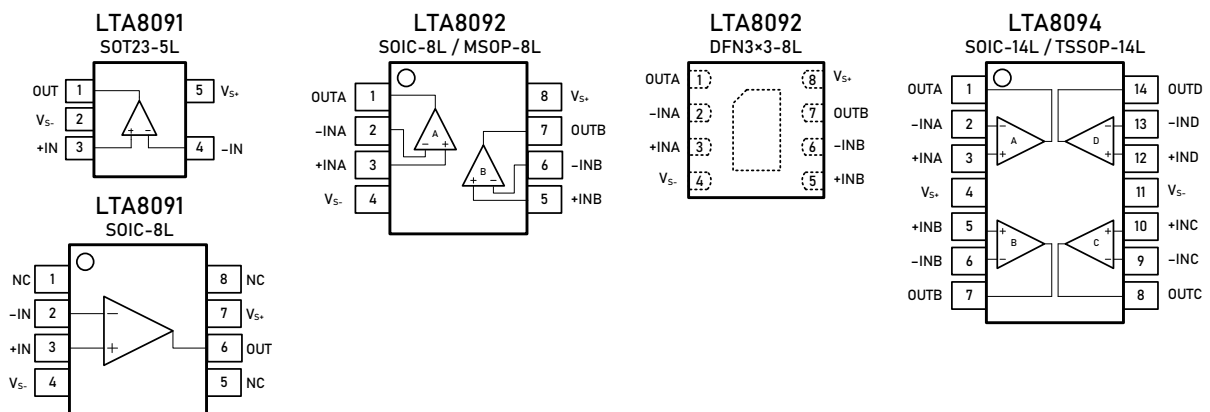

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Pin Description

Symbol	Description
-IN	Inverting input of the amplifier. The voltage range is from V_{S-} to $V_{S+} - 1.5$ V.
+IN	Non-inverting input of the amplifier. This pin has the same voltage range as -IN.
V_{S+}	Positive power supply. The voltage is from 4.5 V to 48 V. Split supplies are possible as long as the voltage between V_{S+} and V_{S-} is from 4.5 V to 48 V.
V_{S-}	Negative power supply. It is normally tied to ground. It can also be tied to a voltage other than ground as long as the voltage between V_{S+} and V_{S-} is from 4.5 V to 48 V.
OUT	Amplifier output.
NC	No connection

Ordering Information

Type Number	Package Name	Package Quantity	Eco Class	Marking Code
LTA8091XT5/R6	SOT23-5L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	H91
LTA8091XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	HV-91
LTA8092XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	HV-92
LTA8092XV8/R6	MSOP-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	HV92
LTA8092XF8/R10	DFN3x3-8L	Tape and Reel, 5 000	Green (RoHS & no Sb/Br)	HV92
LTA8094XS14/R5	SOIC-14L	Tape and Reel, 2 500	Green (RoHS & no Sb/Br)	HV-94
LTA8094XT14/R6	TSSOP-14L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	HV-94

Limiting Value – In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Absolute Maximum Rating
Supply Voltage, V_{S+} to V_{S-}	60 V
Signal Input Terminals: Voltage, Current	$V_{S-} - 0.3$ V to $V_{S+} + 0.3$ V, ± 10 mA
Output Short-Circuit	Continuous
Storage Temperature Range, T_{stg}	-65 °C to $+150$ °C
Junction Temperature, T_j	150 °C
Lead Temperature Range (Soldering 10 sec)	260 °C

ESD Rating

Parameter	Item	Value	Unit
Electrostatic Discharge Voltage	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001	2 000	V
	Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002	2 000	

Electrical Characteristics

$V_S = 4.5 \text{ V to } 48 \text{ V}$, $T_A = +25 \text{ }^\circ\text{C}$, $V_{CM} = V_{OUT} = V_S/2$, and $R_L = 10 \text{ k}\Omega$ connected to $V_S/2$, unless otherwise noted. Boldface limits apply over the specified temperature range, $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<i>OFFSET VOLTAGE</i>						
Input offset voltage	V_{OS}	$V_S = 48\text{V}$ $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		± 75	± 350 ± 400	μV
Offset voltage drift	$V_{OS \text{ TC}}$	$T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		± 1.5		$\mu\text{V}/^\circ\text{C}$
Power supply rejection ratio	PSRR	$V_S = 4.5 \text{ to } 48 \text{ V}$, $V_{CM} = 0.1 \text{ V}$ $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$	90	115		dB
<i>INPUT BIAS CURRENT</i>						
Input bias current	I_B	$T_A = -40 \text{ to } +85 \text{ }^\circ\text{C}$ $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$		10 150 600		pA
Input offset current	I_{OS}			5		pA
<i>NOISE</i>						
Input voltage noise	V_n	$f = 0.1 \text{ to } 10 \text{ Hz}$		3.6		μV_{P-P}
Input voltage noise density	e_n	$f = 1 \text{ kHz}$ $f = 10 \text{ kHz}$		8 4		$\text{nV}/\sqrt{\text{Hz}}$
Input current noise density	i_n	$f = 1 \text{ kHz}$		5		$\text{fA}/\sqrt{\text{Hz}}$
<i>INPUT VOLTAGE</i>						
Common-mode voltage range	V_{CM}		V_{S-}		$V_{S+} - 1.5$	V
Common-mode rejection ratio	CMRR	$V_S = 48 \text{ V}$, $V_{CM} = 0 \text{ to } 46 \text{ V}$ $V_{CM} = 0.1 \text{ to } 38 \text{ V}$, $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$ $V_S = 4.5 \text{ V}$, $V_{CM} = 0 \text{ to } 2.5 \text{ V}$ $V_{CM} = 0.1 \text{ to } 2.2 \text{ V}$, $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$	86 67	110 103 94		dB
<i>INPUT IMPEDANCE</i>						
Input capacitance	C_{IN}	Differential Common mode		2 3.5		pF
<i>OPEN-LOOP GAIN</i>						
Open-loop voltage gain	A_{VOL}	$V_S = 48 \text{ V}$, $V_0 = 0.1 \text{ to } 39.9 \text{ V}$ $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$ $V_S = 4.5 \text{ V}$, $V_0 = 0.1 \text{ to } 4.4 \text{ V}$ $T_A = -40 \text{ to } +125 \text{ }^\circ\text{C}$	114 100	120 105 115		dB
<i>FREQUENCY RESPONSE</i>						
Gain bandwidth product	GBW			22		MHz
Slew rate	SR	$V_S = 30 \text{ V}$, $G = +1$, 8 V step		17		$\text{V}/\mu\text{s}$
Total harmonic distortion + noise	THD+N	$G = +1$, $f = 1 \text{ kHz}$, $V_0 = 3 \text{ V}_{RMS}$		0.0001		%
Settling time	t_S	To 0.1%, $V_S = 40 \text{ V}$, $G = +1$, 5 V step To 0.01%, $V_S = 40 \text{ V}$, $G = +1$, 5 V step		0.9 2		μs
Overload recovery time	t_{OR}	$V_{IN} \times \text{Gain} > V_S$		0.3		μs

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
Linearin and designs are registered trademarks of Linearin Technology Corporation.
© Copyright Linearin Technology Corporation. All Rights Reserved.
All other trademarks mentioned are the property of their respective owners.







Electrical Characteristics (continued)

$V_S = 4\text{ V to }48\text{ V}$, $T_A = +25\text{ }^\circ\text{C}$, $V_{CM} = V_{OUT} = V_S/2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S/2$, unless otherwise noted. Boldface limits apply over the specified temperature range, $T_A = -40\text{ }^\circ\text{C to }+125\text{ }^\circ\text{C}$.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
<i>OUTPUT</i>						
High output voltage swing	V_{OH}	$V_S = \pm 24\text{ V}$, $R_L = 10\text{ k}\Omega$	$V_{S+} - 114$	$V_{S+} - 70$		mV
		$V_S = \pm 24\text{ V}$, $R_L = 2\text{ k}\Omega$	$V_{S+} - 674$	$V_{S+} - 300$		
Low output voltage swing	V_{OL}	$V_S = \pm 24\text{ V}$, $R_L = 10\text{ k}\Omega$		$V_{S-} + 55$	$V_{S-} + 105$	mV
		$V_S = \pm 24\text{ V}$, $R_L = 2\text{ k}\Omega$		$V_{S-} + 280$	$V_{S-} + 614$	
Short-circuit current	I_{SC}			± 35		mA
<i>POWER SUPPLY</i>						
Operating supply voltage	V_S	$T_A = -40\text{ to }+125\text{ }^\circ\text{C}$	4.5		48	V
Quiescent current (per amplifier)	I_Q	$V_S = 4.5\text{ V}$		2.5		mA
		$V_S = 48\text{ V}$		5.14		
<i>THERMAL CHARACTERISTICS</i>						
Operating temperature range	T_A		-40		+125	$^\circ\text{C}$
Package Thermal Resistance	θ_{JA}	SOT23-5L		190		$^\circ\text{C/W}$
		MSOP-8L		201		
		SOIC-8L		125		
		TSSOP-14L		112		
		SOIC-14L		115		

Typical Performance Characteristics


At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S/2$, unless otherwise noted.

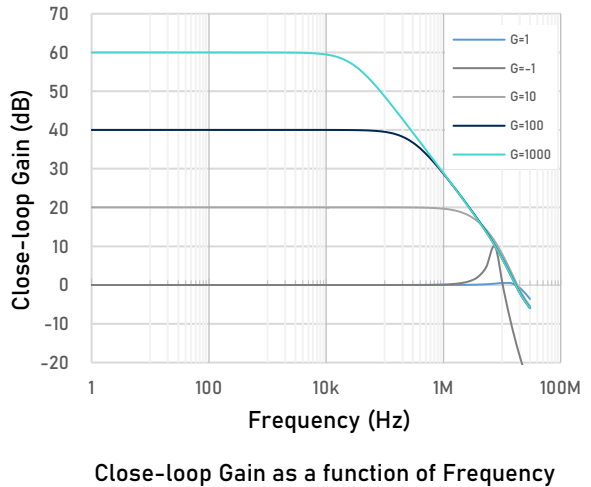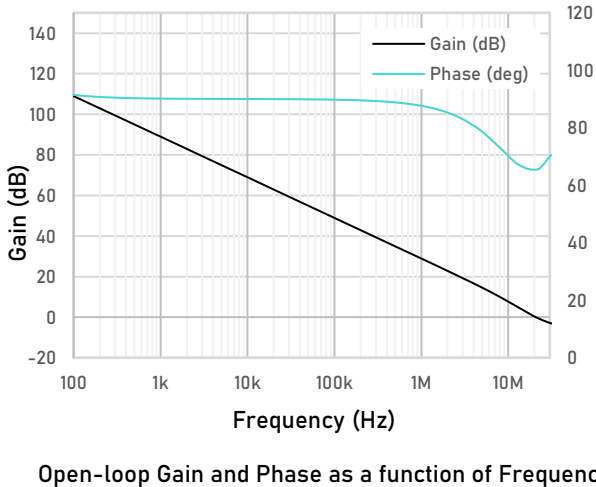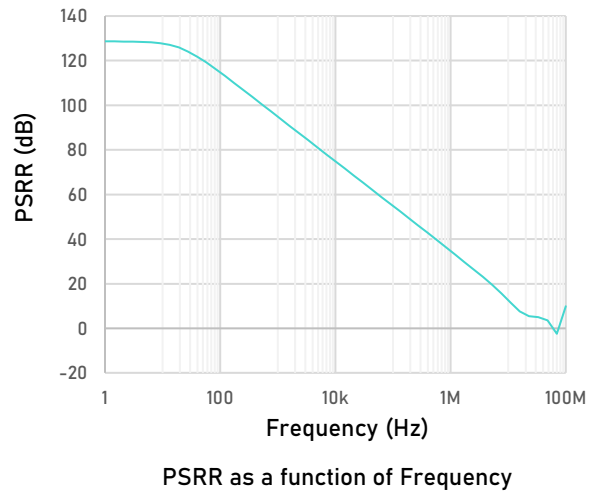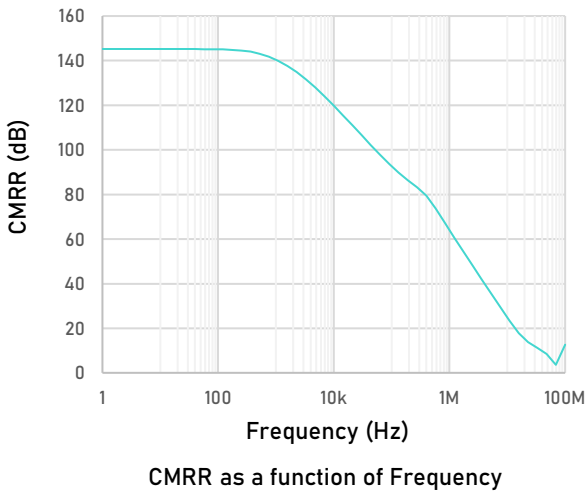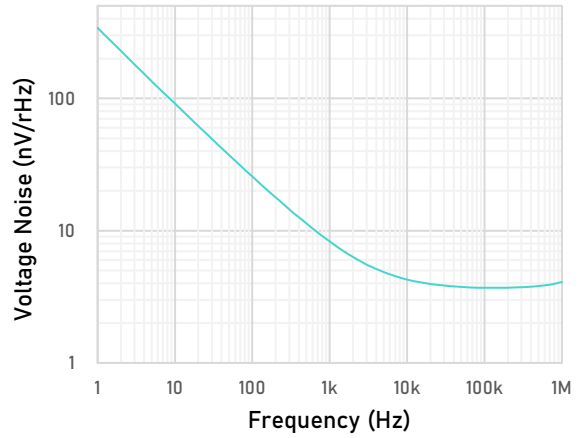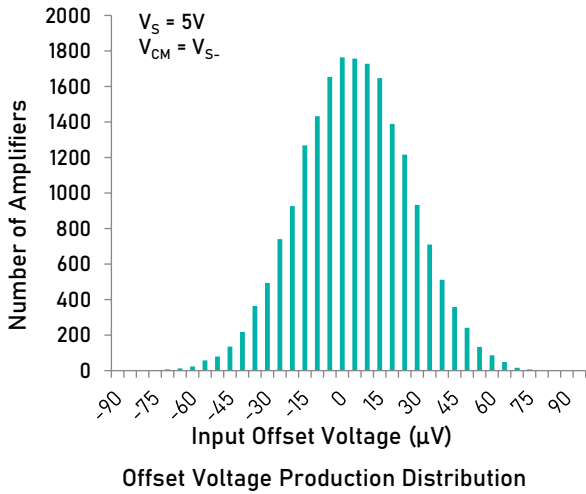


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Typical Performance Characteristics (Continued)


At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S/2$, unless otherwise noted.

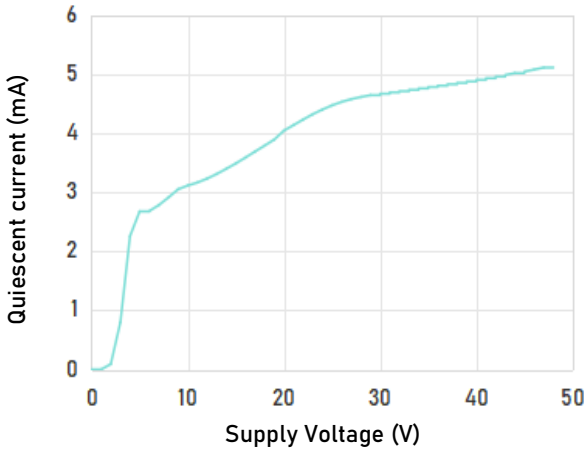


Quiescent Current as a function of Supply Voltage

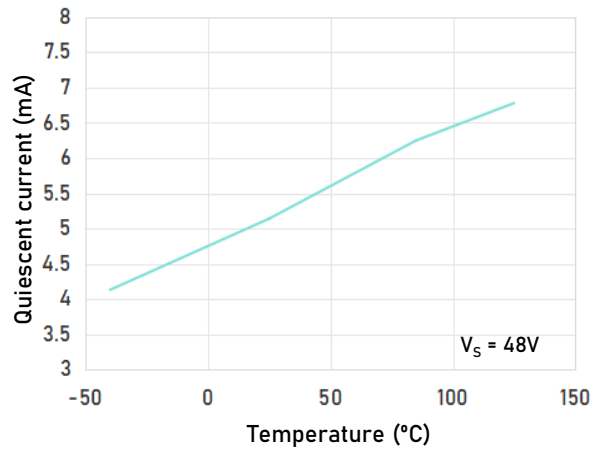


Quiescent Current as a function of Temperature

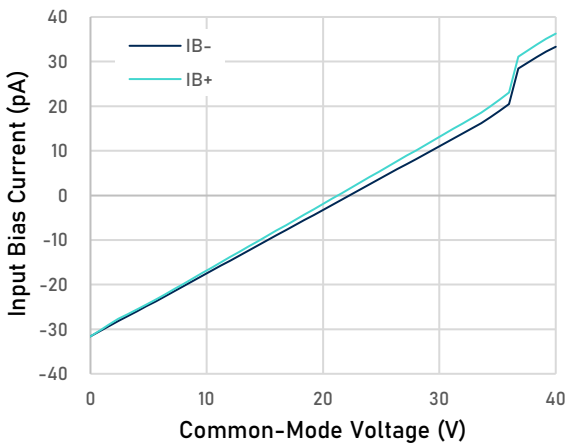


Bias Current as a function of Common-Mode Voltage

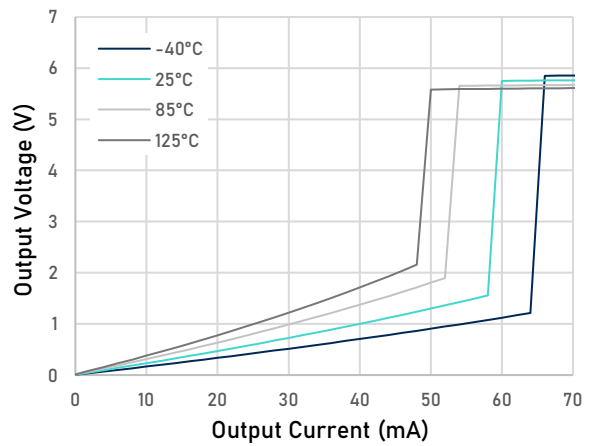

Output Voltage Swing as a function of Output Current (Sinking, $V_S = 40\text{ V}$)

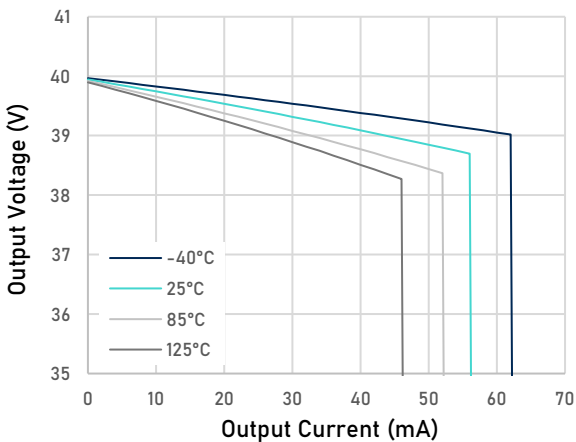

Output Voltage Swing as a function of Output Current (Sourcing, $V_S = 40\text{ V}$)

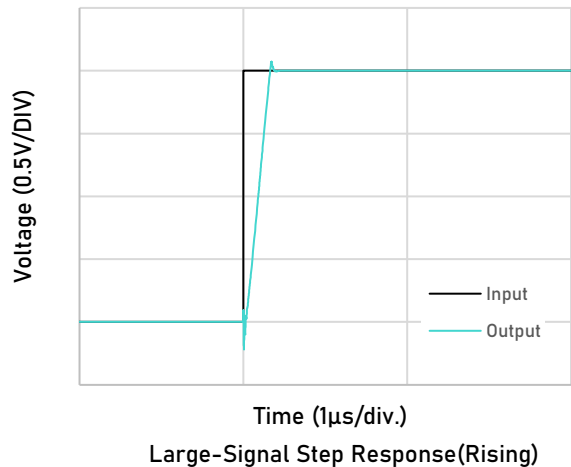


Large-Signal Step Response(Rising)


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Typical Performance Characteristics (Continued)

At $T_A = +25\text{ }^\circ\text{C}$, $V_{CM} = V_S/2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S/2$, unless otherwise noted.

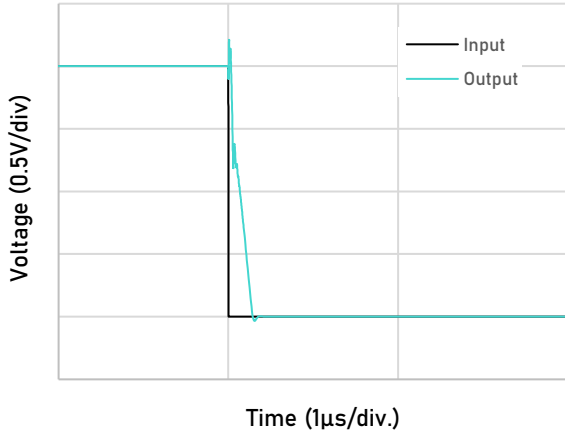


Large-Signal Step Response(Failing)

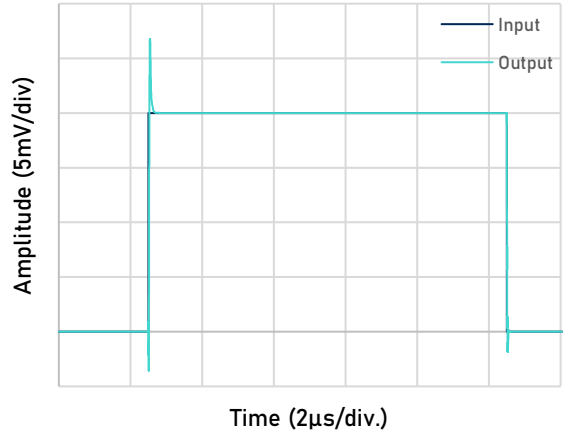


Small-Signal Step Response

Tape and Reel Information

REEL DIMENSIONS

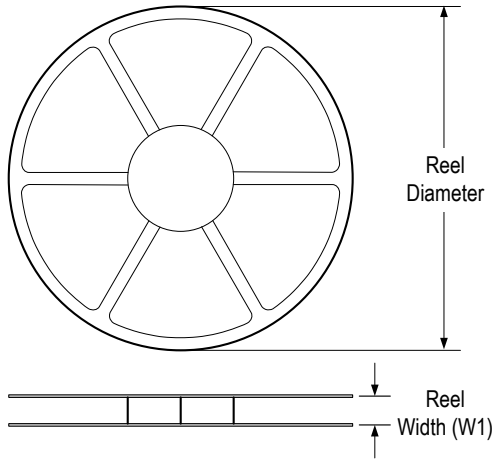


TAPE DIMENSIONS

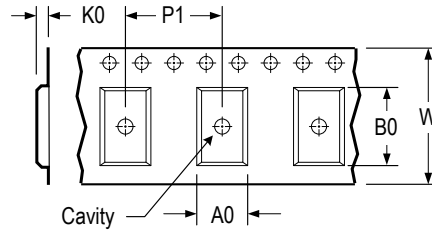

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

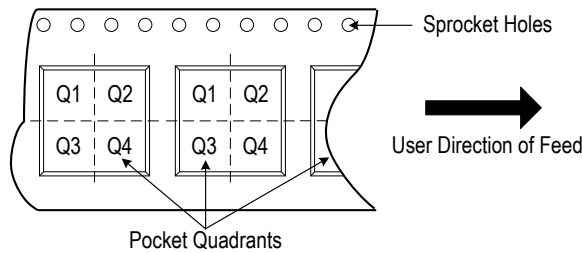


* All dimensions are nominal


Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin 1 Quadrant
LTA8091XT5/R6	SOT23	5	3 000	178	9.5	3.3	3.2	1.5	4.0	8.0	Q3
LTA8091XS8/R8	SOIC	8	4 000	330	12.5	6.6	5.3	2.0	8.0	12.0	Q1
LTA8092XS8/R8	SOIC	8	4 000	330	12.5	6.6	5.3	2.0	8.0	12.0	Q1
LTA8092XV8/R6	MSOP	8	3 000	330	12.5	5.0	3.5	2.0	8.0	12.0	Q1
LTA8092XF8/R10	DFN3x3	8	5 000	330	12.5	3.3	3.3	1.1	8.0	12.0	Q1
LTA8092XS14/R5	SOIC	14	2 500	330	12.5	6.5	9.5	2.0	8.0	16.0	Q1
LTA8092XT14/R6	TSSOP	14	3 000	330	12.5	6.9	5.5	1.3	8.0	16.0	Q1

Package Outlines

DIMENSIONS, SOT23-5L

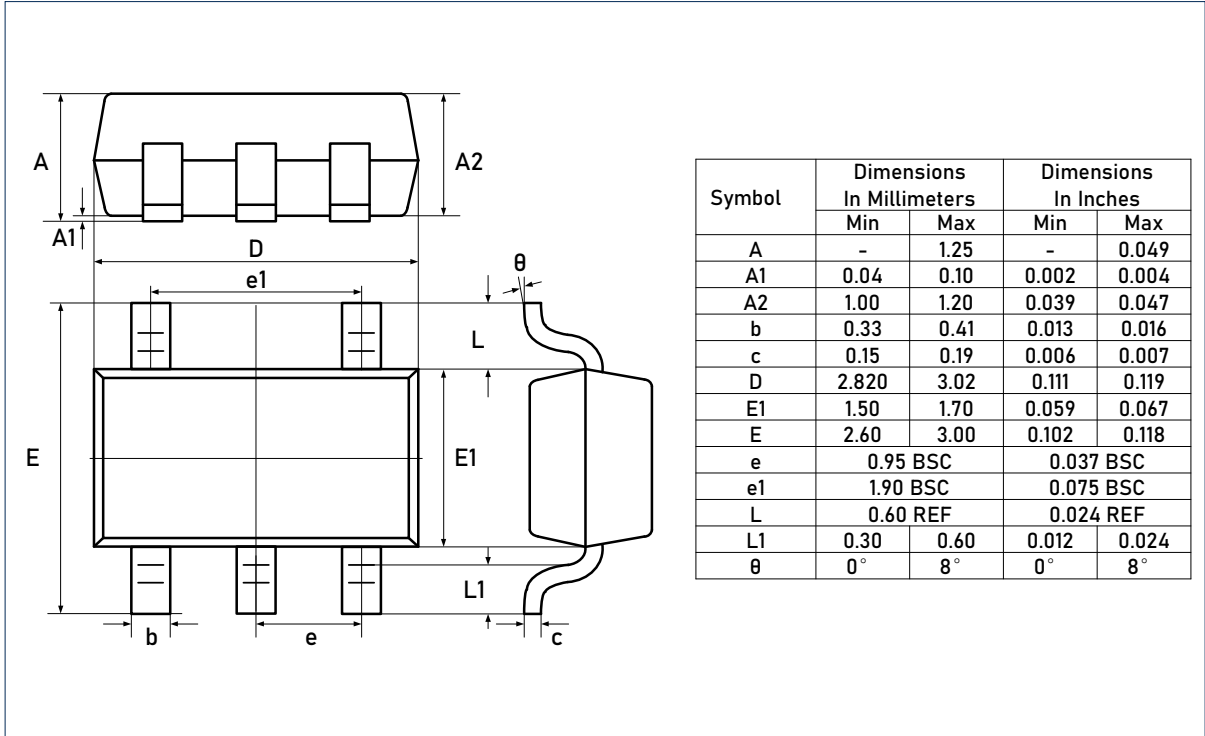


RECOMMENDED SOLDERING FOOTPRINT, SOT23-5L

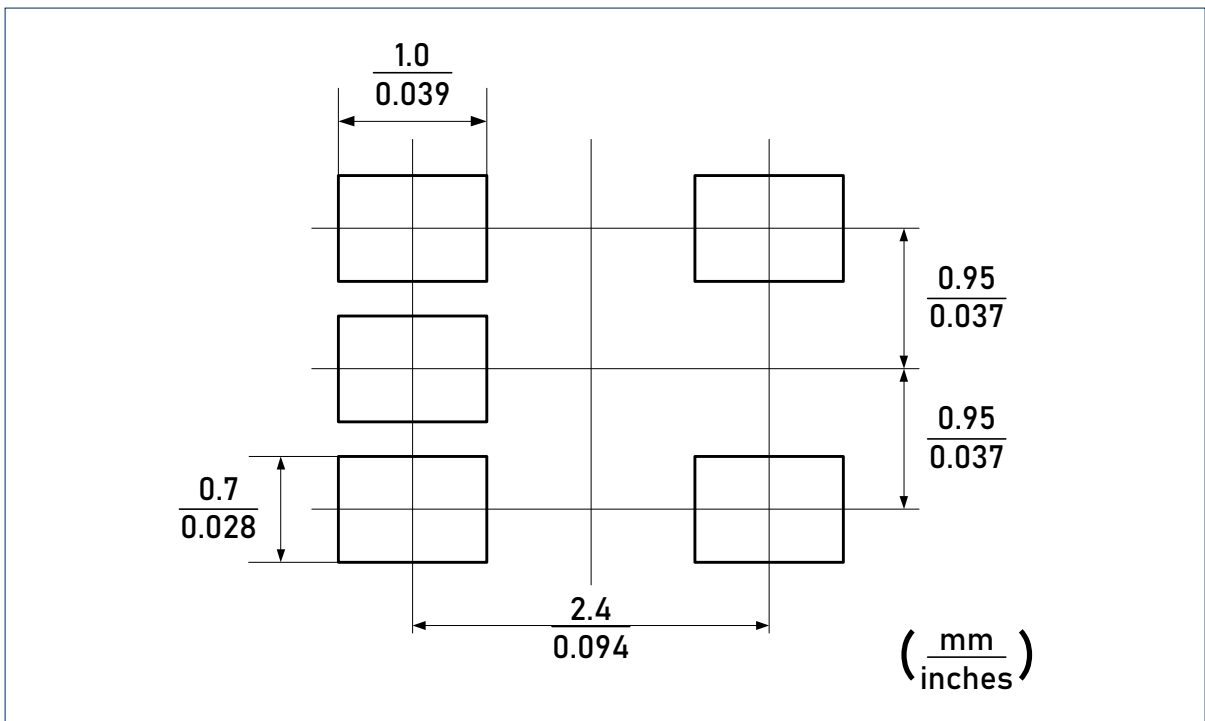


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, SOIC-8L

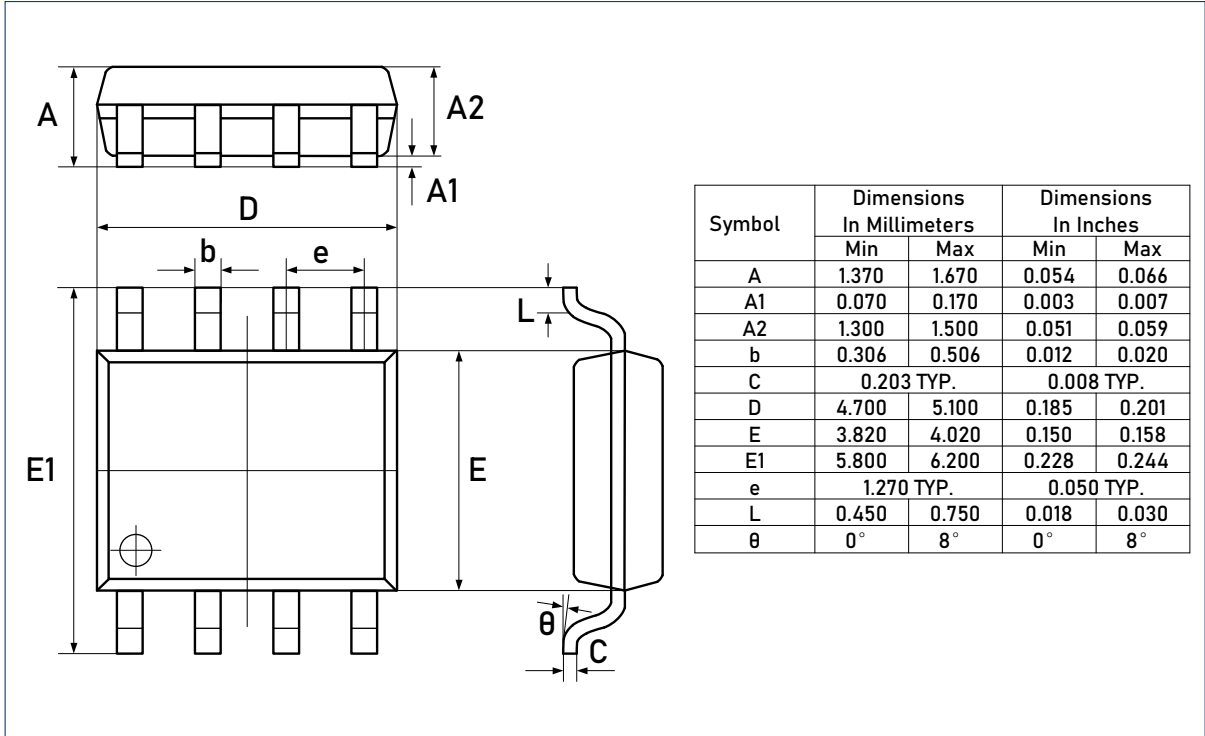


RECOMMENDED SOLDERING FOOTPRINT, SOIC-8L

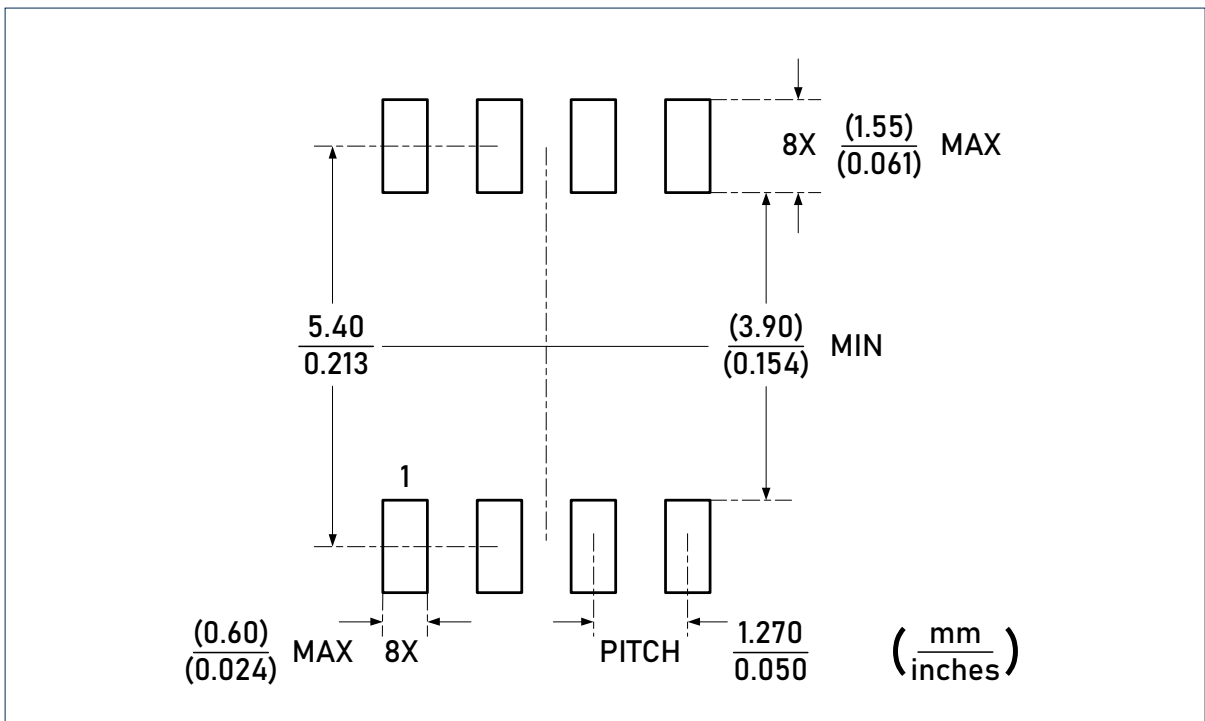


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, MSOP-8L

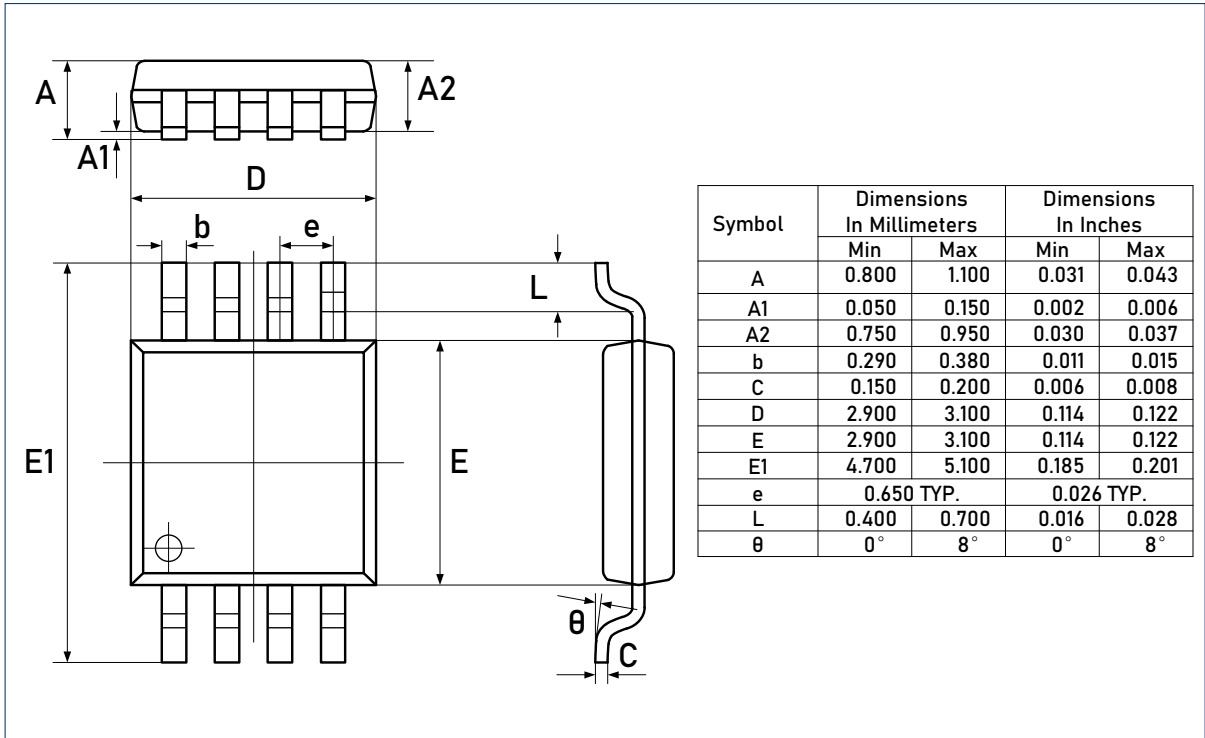


RECOMMENDED SOLDERING FOOTPRINT, MSOP-8L

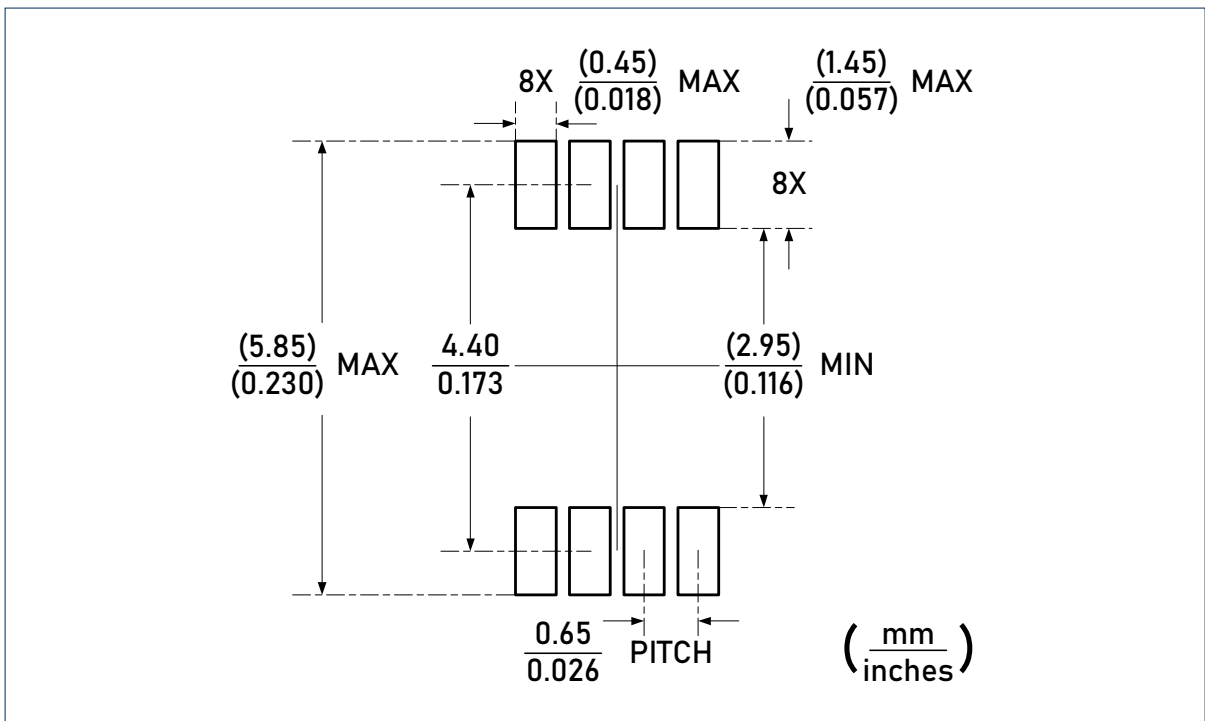

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.


Package Outlines (continued)

DIMENSIONS, DFN3x3-8L

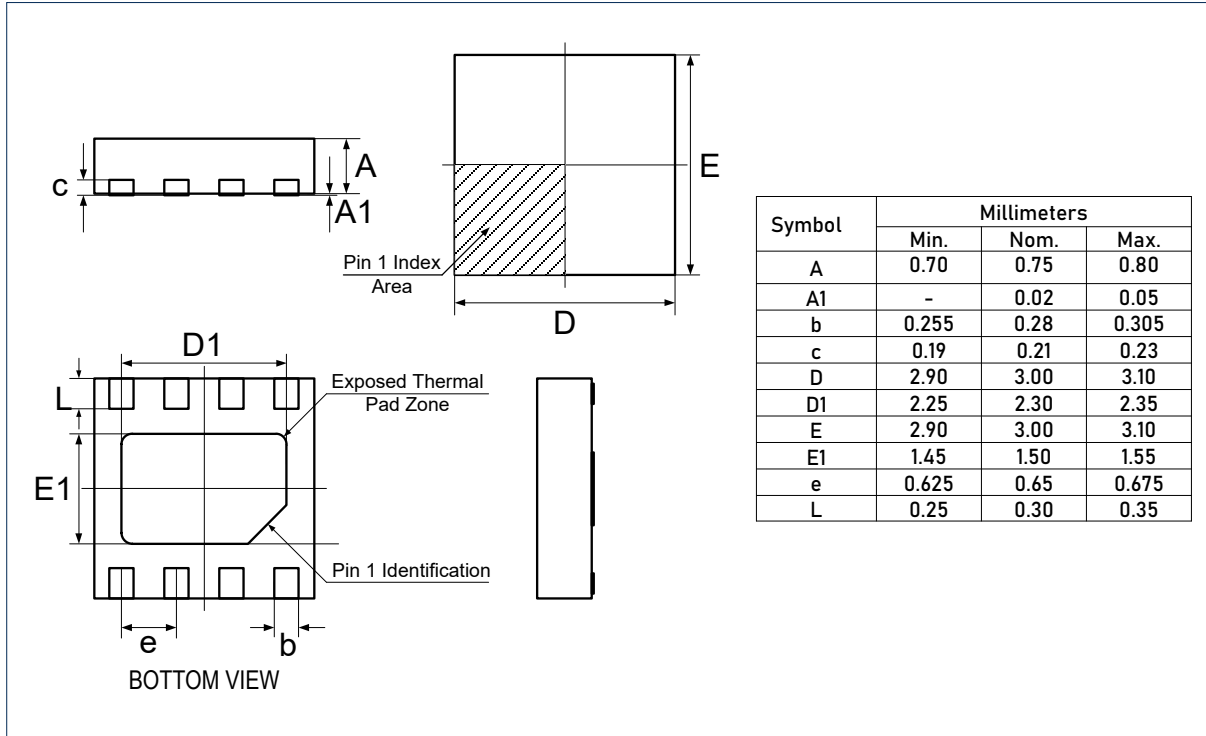


Package Outlines (continued)

DIMENSIONS, SOIC-14L

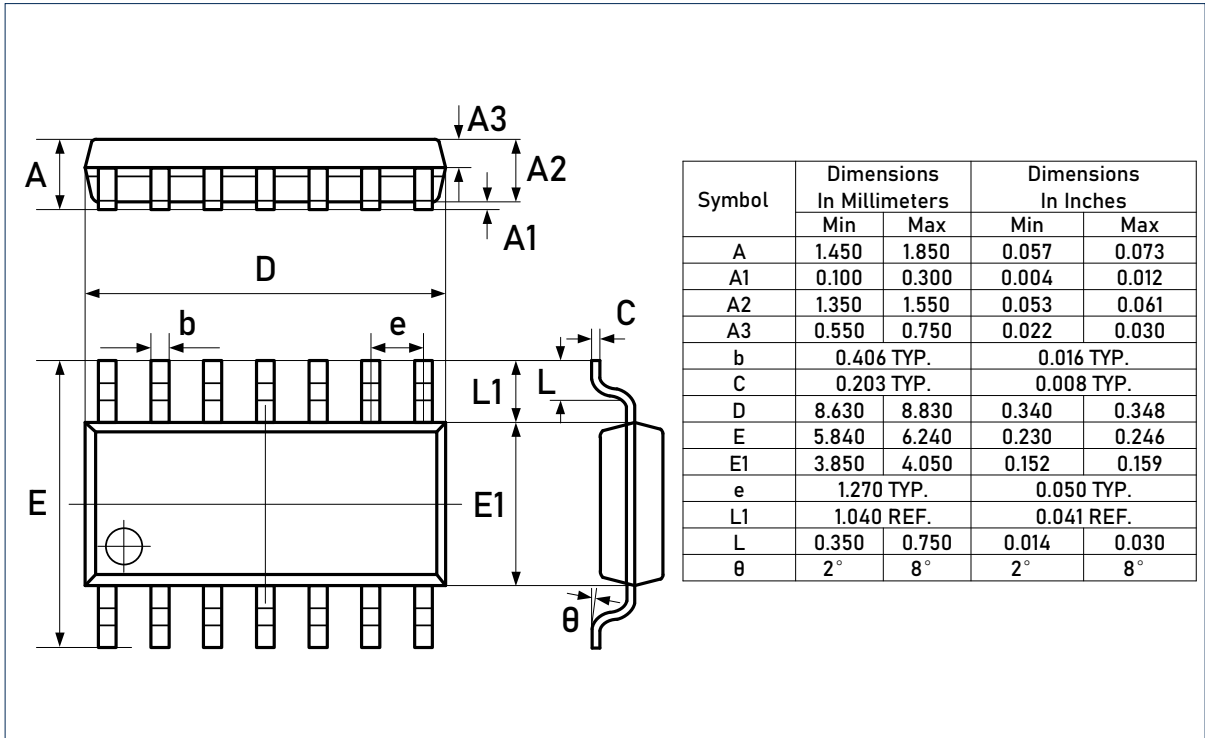


RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

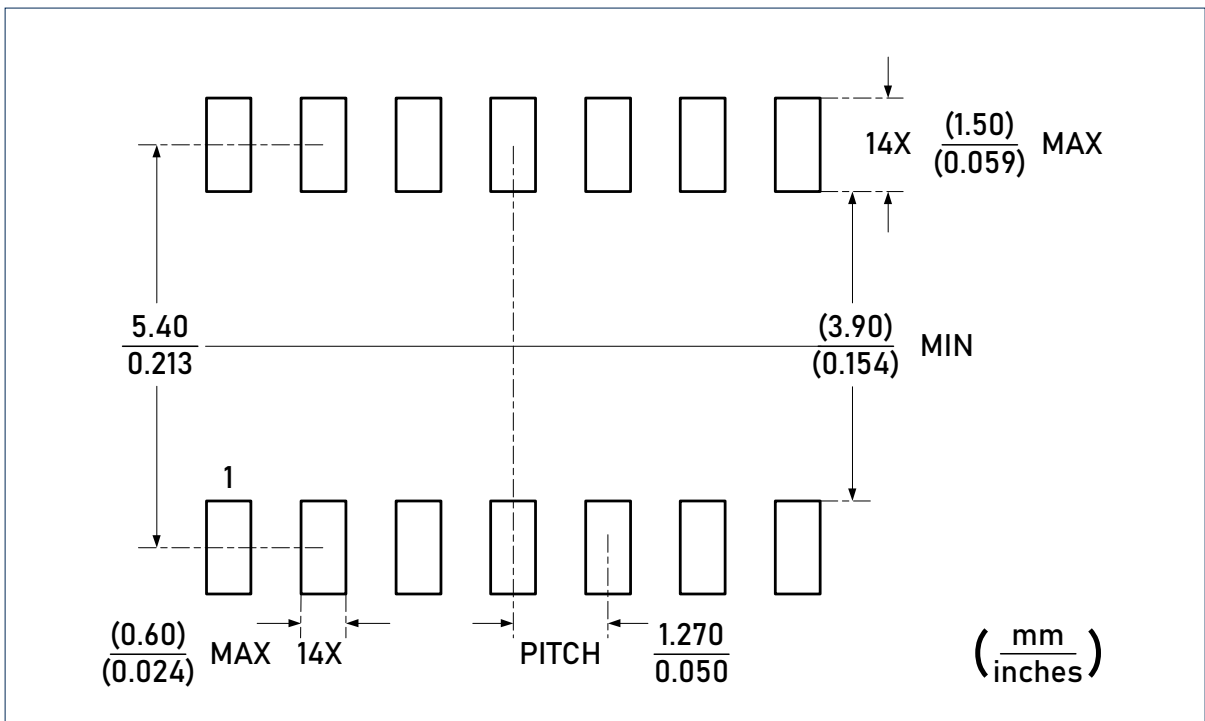


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Package Outlines (continued)

DIMENSIONS, TSSOP-14L

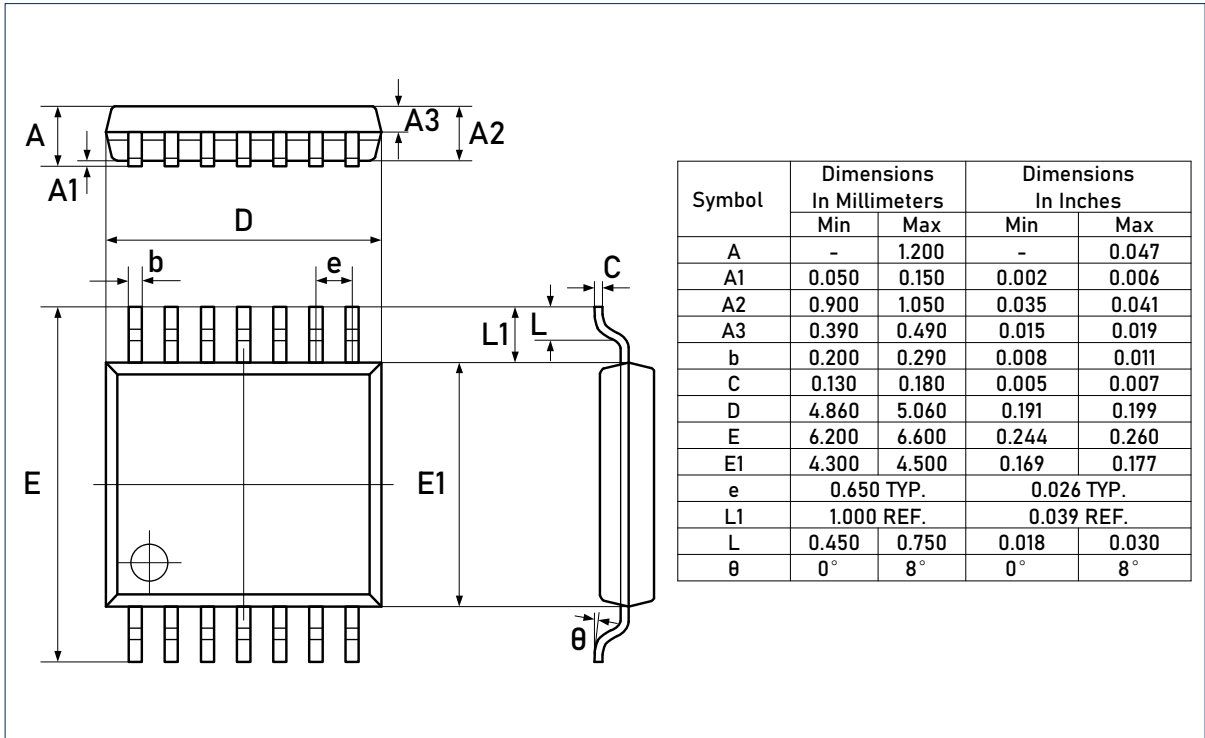

RECOMMENDED SOLDERING FOOTPRINT, TSSOP-14L

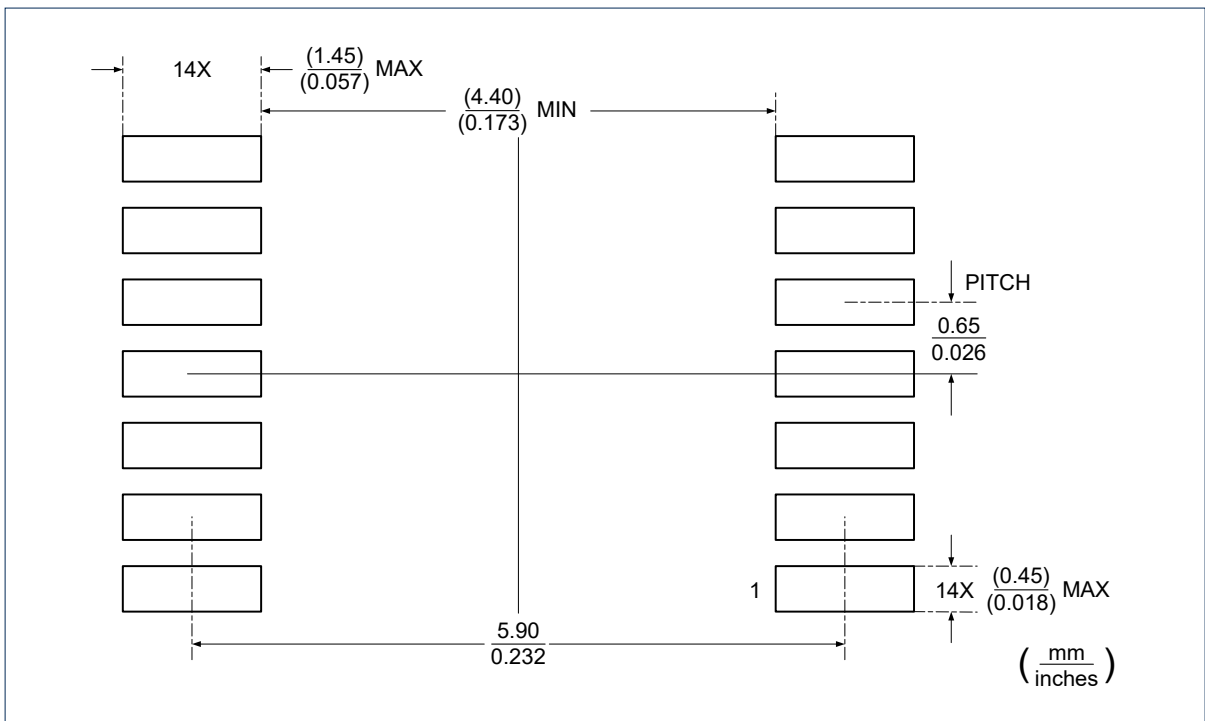

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
 Linearin and designs are registered trademarks of Linearin Technology Corporation.
 © Copyright Linearin Technology Corporation. All Rights Reserved.
 All other trademarks mentioned are the property of their respective owners.

Important Notice

Linearin is a global fabless semiconductor company specializing in advanced high-performance high-quality analog/mixed-signal IC products and sensor solutions. The company is devoted to the innovation of high performance, analog-intensive sensor front-end products and modular sensor solutions, applied in multi-market of medical & wearable devices, smart home, sensing of IoT, intelligent industrial & smart factory (industrie 4.0), and automotives. Linearin's product families include widely-used standard catalog products, solution-based application specific standard products (ASSPs) and sensor modules that help customers achieve faster time-to-market products. Go to <http://www.linearin.com> for a complete list of Linearin product families.

For additional product information, or full datasheet, please contact with the Linearin's Sales Department or Representatives.