

General Description

The LTA604x family true single-supply voltage feedback operational amplifiers feature high speed performance with 100MHz of small signal bandwidth and 107V/ μ s slew rate. The products are specified for +3V, +5V, and $\pm$ 5V supplies, input common mode voltage range extends to 0.2V below V_{S-} and 1V from V_{S+} , and output voltage range extends to within 500mV of either supply rail, allowing wide dynamic range especially desirable in low voltage applications. The LTA604x also offer excellent signal quality of low distortion (-53dBc with a 2V_{pp}, 5MHz output signal) and fast settling time(66ns to 0.1%), which make them ideal as buffers to single-supply ADCs.

Operating on supplies from +2.5 V to +12.6 V and dual supplies up to $\pm$ 6.3 V, the LTA604x are ideal for a wide range of applications, from battery-operated systems with large bandwidth requirements to high speed systems where component density requires lower power dissipation. The single version LTA6041 device is available in micro-size SOT23-5L and SOIC-8L packages. The dual LTA6042 device is offered in SOIC-8L, MSOP-8L and TSSOP-8L packages. The quad LTA6044 device is offered in SOIC-14L and TSSOP-14L packages.


Features and Benefits

- High Speed and Fast Settling on 5 V
 - 100MHz, -3 dB bandwidth (G = +1)
 - 102 V/ μ s slewrate
 - 66 ns settling time to 0.1%
- Fully specified at +3 V, +5 V, and $\pm$ 5 V Supplies
- Low Input Bias Current 4 pA
- Input Common Mode Voltage 0.2 V Beyond V_{S-} , 1 V from V_{S+}
- Output Voltage Swing 500 mV from Rails
- Output Short Circuit Current $\pm$ 150 mA
- Linear Output Current $\pm$ 60 mA at 3 V
- Operating Temperature Range -40°C to +125°C

Applications

- High speed, battery-operated systems
- High component density systems
- Portable test instruments
- A/D buffers
- Active filters
- High speed, set-and-demand amplifiers

Pin Configuration (Top View)

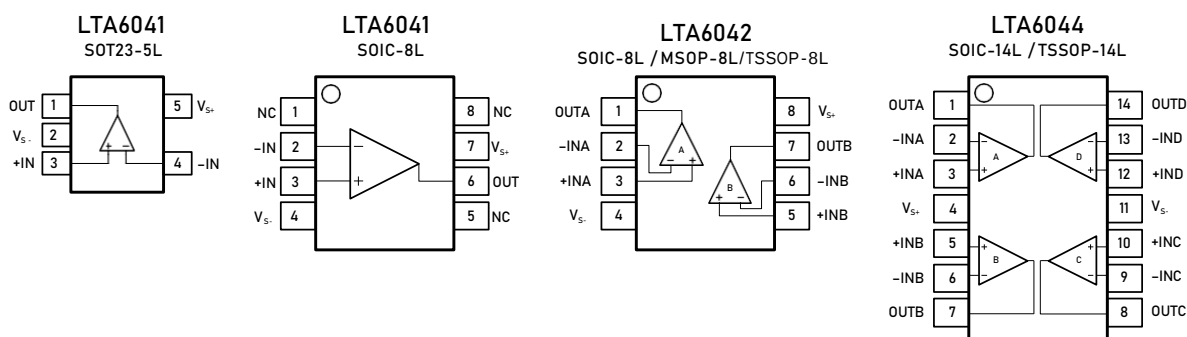

Pin Description

Symbol	Description
-IN	Inverting input of the amplifier. The voltage range is from $V_{S-} - 0.2V$ to $V_{S+} - 1V$.
+IN	Non-inverting input of the amplifier. This pin has the same voltage range as -IN.
V_{S+}	Positive power supply. The voltage is from 2.5V to 12.6V. Split supplies are possible as long as the voltage between V_{S+} and V_{S-} is from 2.5V to 12.6V.
V_{S-}	Negative power supply. It is normally tied to ground. It can also be tied to a voltage other than ground as long as the voltage between V_{S+} and V_{S-} is from 2.5V to 12.6V.
OUT	Amplifier output.
NC	No connection

Ordering Information

Type Number	Package Name	Package Quantity	Eco Class	Marking Code
LTA6041XT5/R6	SOT23-5L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	W41
LTA6041XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	W6041
LTA6042XS8/R8	SOIC-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	W6042
LTA6042XV8/R6	MSOP-8L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	W6042
LTA6042XT8/R8	TSSOP-8L	Tape and Reel, 4 000	Green (RoHS & no Sb/Br)	W6042
LTA6044XS14/R5	SOIC-14L	Tape and Reel, 2 500	Green (RoHS & no Sb/Br)	W6044
LTA6044XT14/R6	TSSOP-14L	Tape and Reel, 3 000	Green (RoHS & no Sb/Br)	W6044

Limiting Value – In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Absolute Maximum Rating
Supply Voltage, V_{S+} to V_{S-}	13.5 V
Signal Input Terminals: Voltage, Current	$V_{S-} - 0.5 V$ to $V_{S+} + 0.5 V$, ± 10 mA
Output Short-Circuit	Continuous
Storage Temperature Range, T_{stg}	-65 to $+150$ °C
Junction Temperature, T_j	150 °C
Lead Temperature Range (Soldering 10 sec)	260 °C

ESD Rating

Parameter	Item	Value	Unit
Electrostatic Discharge Voltage	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001	$\pm 4\ 000$	V
	Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002	$\pm 2\ 000$	

Electrical Characteristics

$V_S = 3\text{ V}$, $T_A = +25\text{ }^\circ\text{C}$, $V_{CM} = V_O = V_S/2$, and $R_L = 2\text{ k}\Omega$ to $V_S/2$, unless otherwise noted.
Boldface limits apply over the specified temperature range, $T_A = -40\text{ }^\circ\text{C}$ to $+125\text{ }^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
DYNAMIC PERFORMANCE						
BW _{-3dB}	-3 dB Small Signal Bandwidth	G = +1, V _O = 0.2V _{PP}		95		MHz
		G = +2, -1, V _O = 0.2V _{PP}		38		
BW _{0.1dB}	Bandwidth for 0.1 dB Flatness	G = +2, V _O = 0.2V _{PP} , R _L = 150Ω to V _S /2, R _F = 402Ω		8.5		MHz
SR	Slew rate	G = -1, V _O = 2V step		98		V/μs
BW _{FP}	Full Power Response	G = +1, V _O = 1V _{PP}		11		MHz
t _S	Settling time to 0.1%	G = -1, V _O = 2V step		66		ns
NOISE/DISTORTION PERFORMANCE						
THD	Total harmonic distortion	f _C = 5MHz, V _O = 2V _{PP} , G = +2		-36		dBc
e _n	Input voltage noise density	f = 100kHz		27		nV/√Hz
I _n	Input current noise density	f = 10kHz		3		pA/√Hz
DG	Differential Gain Error (NTSC)	G = +2, R _L = 150Ω to V _S /2		0.17		%
		R _L = 1kΩ to V _S /2		0.03		
DP	Differential Phase Error (NTSC)	G = +2, R _L = 150Ω to V _S /2		0.05		deg.
		R _L = 1kΩ to V _S /2		0.03		
DC PERFORMANCE						
V _{OS}	Input offset voltage			±3	±15	mV
V _{OS} TC	Offset voltage drift	T _A = -40 to +125°C		±5		μV/°C
I _B	Input bias current			4		pA
I _{OS}	Input offset current			2		pA
A _{VOL}	Open-loop voltage gain	R _L = 2kΩ to V _S /2, V _O = 0.5V to 2.5V		95		dB
		R _L = 150Ω to V _S /2, V _O = 0.5V to 2.5V		82		
INPUT CHARACTERISTICS						
R _{IN}	Input Resistance	Common mode		1		GΩ
C _{IN}	Input capacitance	Common mode		2		pF
V _{CM}	Common-mode voltage range	CMRR ≥ 50dB	-0.2		2	V
CMRR	Common-mode rejection ratio	V _{CM} = 0V to 1.5 V		85		dB
OUTPUT						
V _{OH}	High output voltage swing	R _L = 2kΩ to V _S /2		2.97		V
		R _L = 150Ω to V _S /2		2.85		
V _{OL}	Low output voltage swing	R _L = 2kΩ to V _S /2		30		mV
		R _L = 150Ω to V _S /2		230		
I _{OUT}	Output Current	V _{OUT} = 0.5V from either supply		±60		mA
I _{SC}	Short-circuit current			±110		mA
C _{LOAD}	Capacitive load drive	G = +2		40		pF

Electrical Characteristics (Cont.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
POWER SUPPLY						
V_S	Operating supply range		2.5		12.6	V
I_Q	Quiescent current /Amplifier			4.1		mA
PSRR	Power supply rejection ratio	$V_S = 3.0$ to 3.5 V		70		dB

$V_S = 5$ V, $T_A = +25$ °C, $V_{CM} = V_O = V_S/2$, and $R_L = 2$ k Ω to $V_S/2$, unless otherwise noted.
Boldface limits apply over the specified temperature range, $T_A = -40$ °C to $+125$ °C.

DYNAMIC PERFORMANCE

BW_{-3dB}	-3 dB Small Signal Bandwidth	$G = +1$, $V_O = 0.2V_{PP}$	100			MHz
		$G = +2$, -1 , $V_O = 0.2V_{PP}$	38			
$BW_{0.1dB}$	Bandwidth for 0.1 dB Flatness	$G = +2$, $V_O = 0.2V_{PP}$, $R_L = 150\Omega$ to $V_S/2$, $R_F = 402\Omega$	8			MHz
SR	Slew rate	$G = -1$, $V_O = 2$ V step	102			V/ μ s
BW_{FP}	Full Power Response	$G = +1$, $V_O = 2V_{PP}$	14			MHz
t_s	Settling time to 0.1%	$G = -1$, $V_O = 2$ V step	66			ns

NOISE/DISTORTION PERFORMANCE

THD	Total harmonic distortion	$f_C = 5$ MHz, $V_O = 2V_{PP}$, $G = +2$	-49			dBc
e_n	Input voltage noise density	$f = 100$ kHz	27			nV/ $\sqrt{\text{Hz}}$
I_n	Input current noise density	$f = 10$ kHz	3			pA/ $\sqrt{\text{Hz}}$
DG	Differential Gain Error (NTSC)	$G = +2$, $R_L = 150\Omega$ to $V_S/2$	0.16			%
		$R_L = 1$ k Ω to $V_S/2$	0.05			
DP	Differential Phase Error (NTSC)	$G = +2$, $R_L = 150\Omega$ to $V_S/2$	0.05			deg.
		$R_L = 1$ k Ω to $V_S/2$	0.01			

DC PERFORMANCE

V_{OS}	Input offset voltage		± 2	± 15		mV
$V_{OS\ TC}$	Offset voltage drift	$T_A = -40$ to $+125$ °C	± 5			$\mu\text{V}/^\circ\text{C}$
I_B	Input bias current		4			pA
I_{OS}	Input offset current		2			pA
A_{VOL}	Open-loop voltage gain	$R_L = 2$ k Ω to $V_S/2$, $V_O = 0.5$ V to 2.5 V	98			dB
		$R_L = 150\Omega$ to $V_S/2$, $V_O = 0.5$ V to 2.5 V	82			

INPUT CHARACTERISTICS

R_{IN}	Input Resistance	Common mode	1			G Ω
C_{IN}	Input capacitance	Common mode	2			pF
V_{CM}	Common-mode voltage range	CMRR ≥ 50 dB	-0.2		4	V
CMRR	Common-mode rejection ratio	$V_{CM} = 0$ V to 1.5 V	95			dB

OUTPUT

V_{OH}	High output voltage swing	$R_L = 2$ k Ω to $V_S/2$	4.9			V
		$R_L = 150\Omega$ to $V_S/2$	4.8			

Electrical Characteristics (Cont.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{OL}	Low output voltage swing	$R_L = 2k\Omega$ to $V_S/2$		60		mV
		$R_L = 150\Omega$ to $V_S/2$		370		
I_{OUT}	Output Current	$V_{OUT} = 0.5V$ from either supply		± 65		mA
I_{SC}	Short-circuit current			± 130		mA
C_{LOAD}	Capacitive load drive	$G = +2$		40		pF

POWER SUPPLY

V_S	Operating supply range		2.5		12.6	V
I_Q	Quiescent current /Amplifier			4.2		mA
PSRR	Power supply rejection ratio	$V_S = 4.0$ to $6V$		78		dB

$V_S = 10V$, $T_A = +25^\circ C$, $V_{CM} = V_O = V_S/2$, and $R_L = 2k\Omega$ to $V_S/2$, unless otherwise noted.
 Boldface limits apply over the specified temperature range, $T_A = -40^\circ C$ to $+125^\circ C$.

DYNAMIC PERFORMANCE

BW_{-3dB}	-3 dB Small Signal Bandwidth	$G = +1$, $V_O = 0.2V_{PP}$		105		MHz
		$G = +2$, -1 , $V_O = 0.2V_{PP}$		43		
$BW_{0.1dB}$	Bandwidth for 0.1 dB Flatness	$G = +2$, $V_O = 0.2V_{PP}$, $R_L = 150\Omega$ to $V_S/2$, $R_F = 402\Omega$		6		MHz
SR	Slew rate	$G = -1$, $V_O = 2V$ step		107		V/ μs
BW_{FP}	Full Power Response	$G = +1$, $V_O = 2V_{PP}$		16		MHz
t_S	Settling time to 0.1%	$G = -1$, $V_O = 2V$ step		66		ns

NOISE/DISTORTION PERFORMANCE

THD	Total harmonic distortion	$f_C = 5MHz$, $V_O = 2V_{PP}$, $G = +2$		-53		dBc
e_n	Input voltage noise density	$f = 100kHz$		27		nV/ $\sqrt{Hz}$
i_n	Input current noise density	$f = 10kHz$		3		pA/ $\sqrt{Hz}$
DG	Differential Gain Error (NTSC)	$G = +2$, $R_L = 150\Omega$ to $V_S/2$		0.15		%
		$R_L = 1k\Omega$ to $V_S/2$		0.02		
DP	Differential Phase Error (NTSC)	$G = +2$, $R_L = 150\Omega$ to $V_S/2$		0.05		deg.
		$R_L = 1k\Omega$ to $V_S/2$		0.02		

DC PERFORMANCE

V_{OS}	Input offset voltage			± 2	± 15	mV
$V_{OS\ TC}$	Offset voltage drift	$T_A = -40$ to $+125^\circ C$		± 5		$\mu V/^\circ C$
I_B	Input bias current			4		pA
I_{OS}	Input offset current			2		pA
A_{VOL}	Open-loop voltage gain	$R_L = 2k\Omega$ to $V_S/2$, $V_O = 0.5V$ to $2.5V$		96		dB
		$R_L = 150\Omega$ to $V_S/2$, $V_O = 0.5V$ to $2.5V$		82		

INPUT CHARACTERISTICS







R_{IN}	Input Resistance	Common mode		1		G Ω
C_{IN}	Input capacitance	Common mode		2		pF

Electrical Characteristics (Cont.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{CM}	Common-mode voltage range	$CMRR \geq 50dB$	-0.2		9	V
$CMRR$	Common-mode rejection ratio	$V_{CM} = 0V$ to $1.5V$		95		dB
OUTPUT						
V_{OH}	High output voltage swing	$R_L = 2k\Omega$ to $V_S/2$		4.91		V
		$R_L = 150\Omega$ to $V_S/2$		4.52		
V_{OL}	Low output voltage swing	$R_L = 2k\Omega$ to $V_S/2$		-4.9		V
		$R_L = 150\Omega$ to $V_S/2$		-4.5		
I_{OUT}	Output Current	$V_{OUT} = 0.5V$ from either supply		± 70		mA
I_{SC}	Short-circuit current			± 150		mA
C_{LOAD}	Capacitive load drive	$G = +2$		40		pF
POWER SUPPLY						
V_S	Operating supply range		2.5		12.6	V
I_Q	Quiescent current /Amplifier			4.4		mA
$PSRR$	Power supply rejection ratio	$V_S = \pm 4.5V$ to $\pm 5.5V$		78		dB
THERMAL CHARACTERISTICS						
T_A	Operating temperature range		-40		+125	°C
θ_{JA}	Package Thermal Resistance	SOT23-5L		190		°C/W
		SOIC-8L		125		
		MSOP-8L		201		
		TSSOP-8L		160		
		TSSOP-14L		112		
		SOIC-14L		115		


Typical Performance Characteristics

$T_A = +25\text{ }^{\circ}\text{C}$, $V_{CM} = V_O = V_S/2$, and $R_L = 2\text{ k}\Omega$ to $V_S/2$, unless otherwise noted.
 Boldface limits apply over the specified temperature range, $T_A = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$.

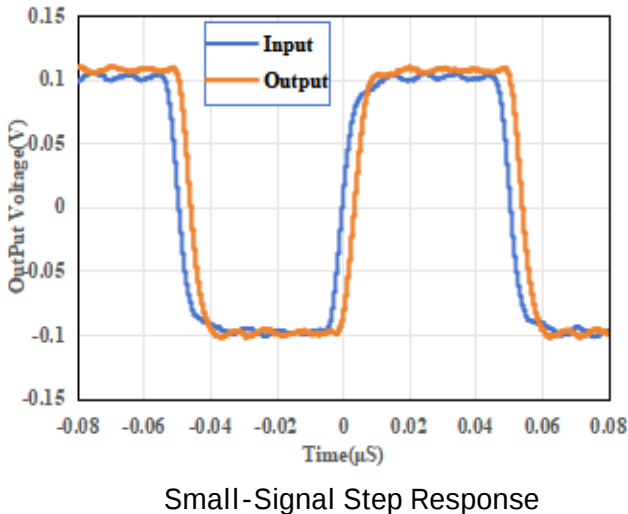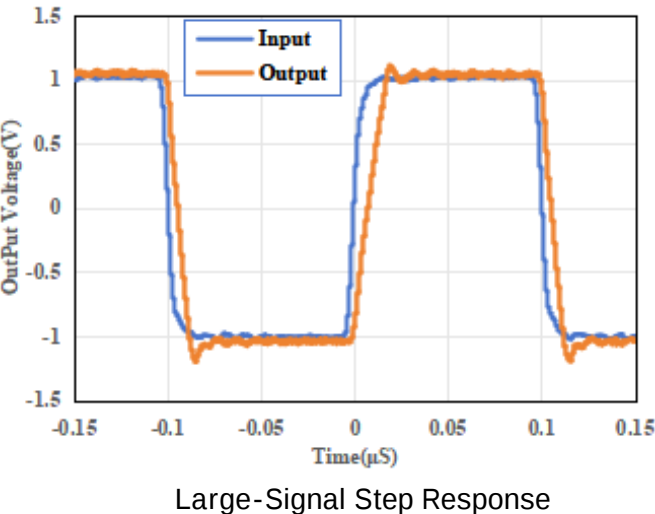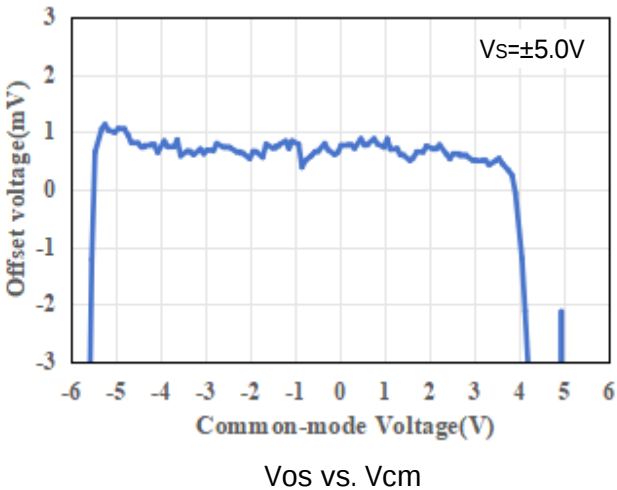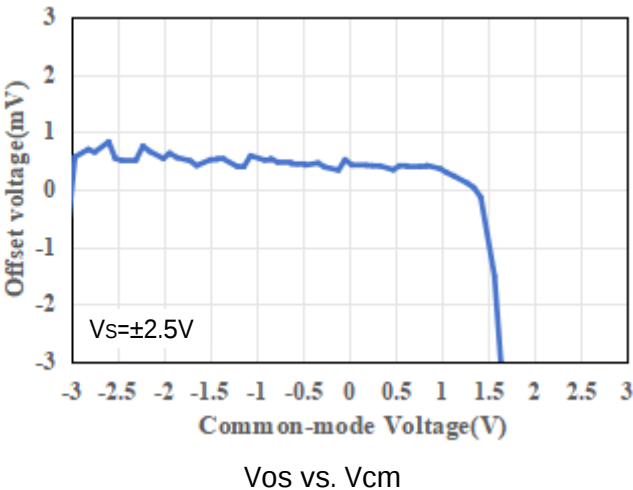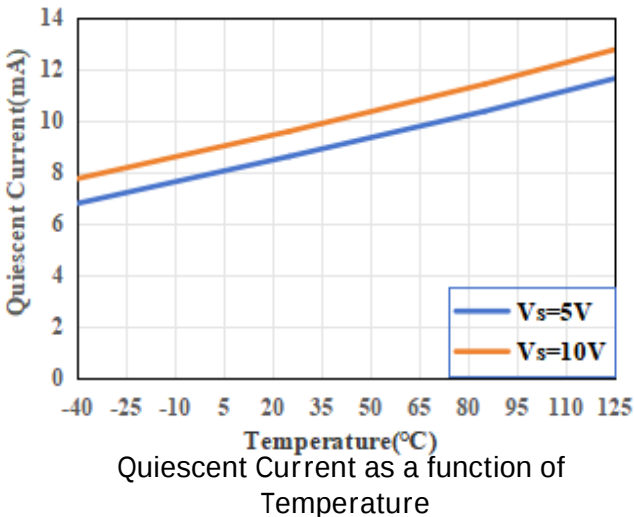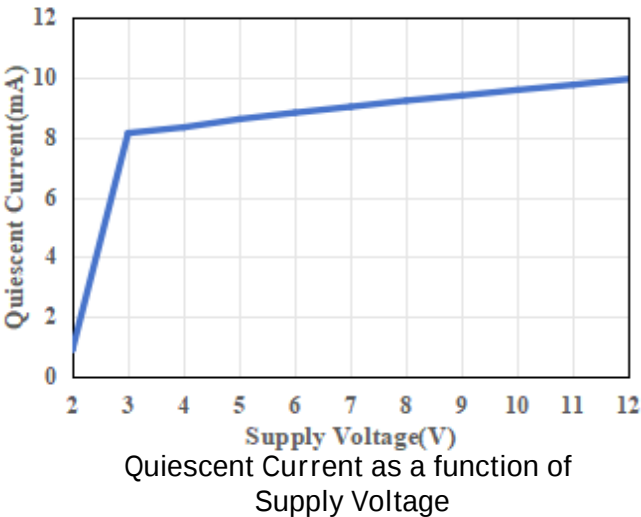


Typical Performance Characteristics (Cont.)

T_A = +25 °C, V_{CM} = V_O = V_S/2, and R_L = 2 kΩ to V_S/2, unless otherwise noted.
Boldface limits apply over the specified temperature range, T_A = -40 °C to +125 °C.

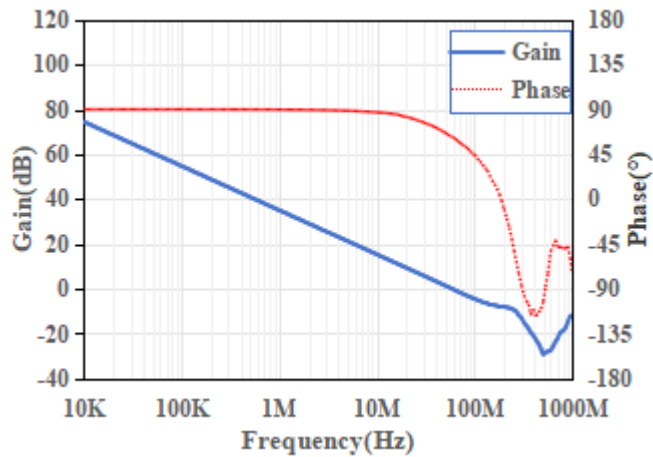


Open-Loop Gain and Phase vs. Frequency
(G=+100)

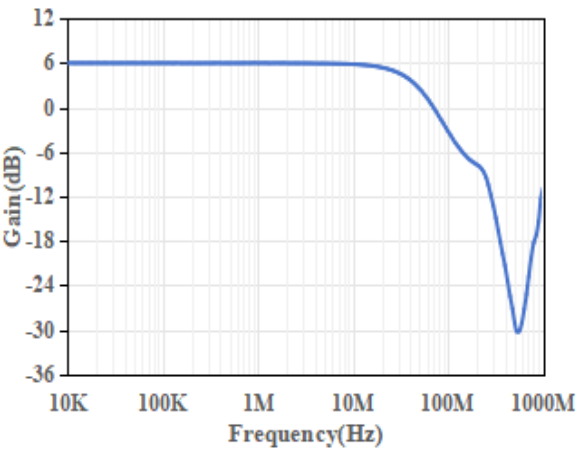


Open-Loop Gain and Phase vs. Frequency
(G=+2)

Tape and Reel Information

REEL DIMENSIONS

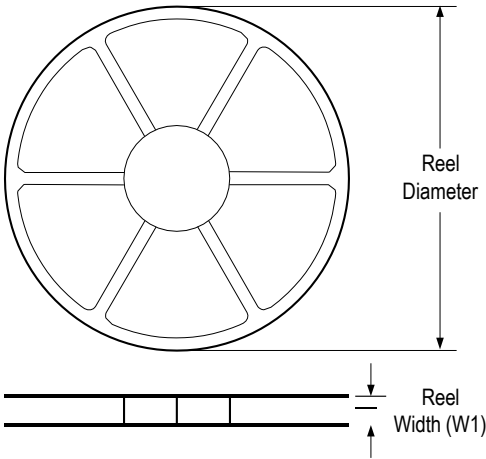


TAPE DIMENSIONS

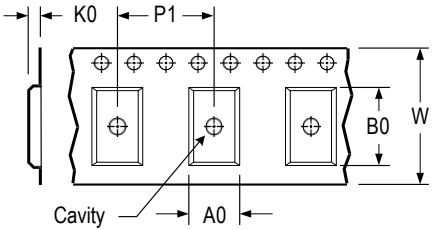

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

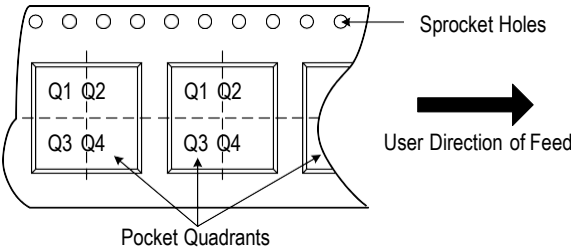


* All dimensions are nominal


Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin 1 Quadrant
LTA6041XT5/R6	SOT23	5	3 000	178	9.5	3.3	3.2	1.5	4.0	8.0	Q3
LTA6041XS8/R8	SOIC	8	4 000	330	12.5	6.6	5.3	2.0	8.0	12.0	Q1
LTA6042XS8/R8	SOIC	8	4 000	330	12.5	6.6	5.3	2.0	8.0	12.0	Q1
LTA6042XV8/R6	MSOP	8	3 000	330	12.5	5.0	3.5	2.0	8.0	12.0	Q1
LTA6042XT8/R8	TSSOP	8	4 000	330	12.5	6.5	4.0	1.2	8.0	12.0	Q1
LTA6044XS14/R5	SOIC	14	2 500	330	16.5	6.5	9.5	2.0	8.0	16.0	Q1
LTA6044XT14/R6	TSSOP	14	3 000	330	16.5	6.9	5.5	1.3	8.0	16.0	Q1

Package Outlines

DIMENSIONS, SOT23-5L

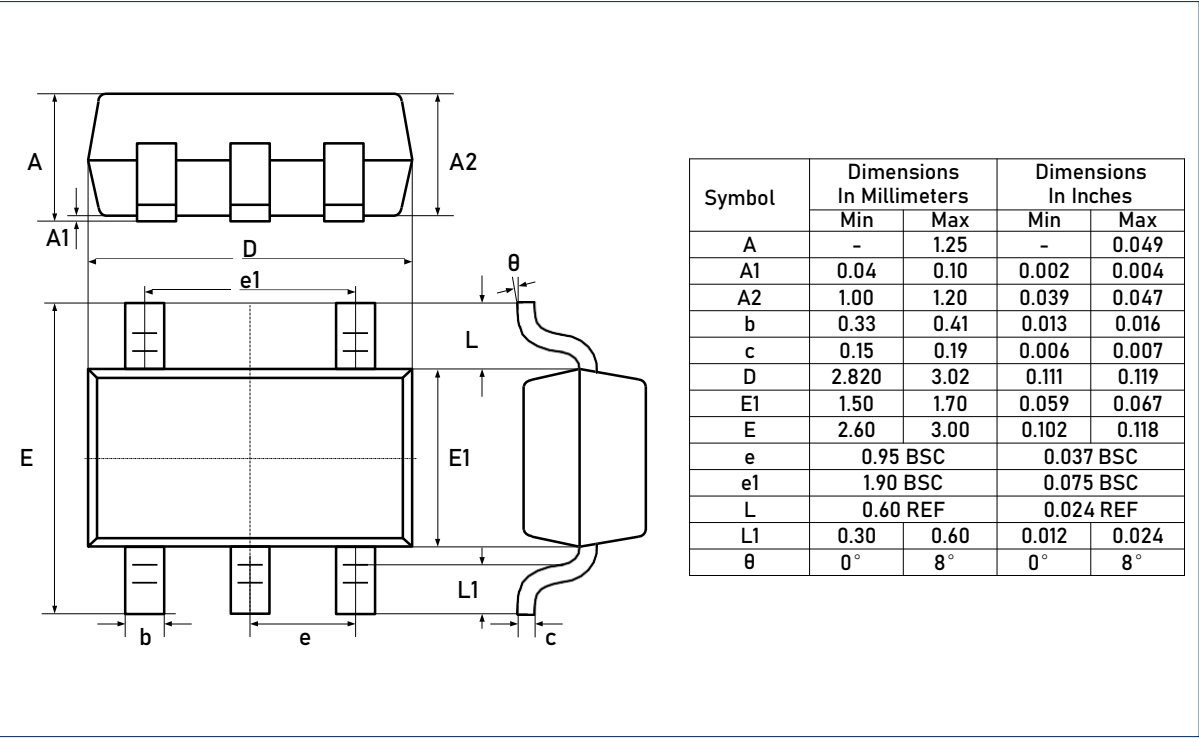


RECOMMENDED SOLDERING FOOTPRINT, SOT23-5L

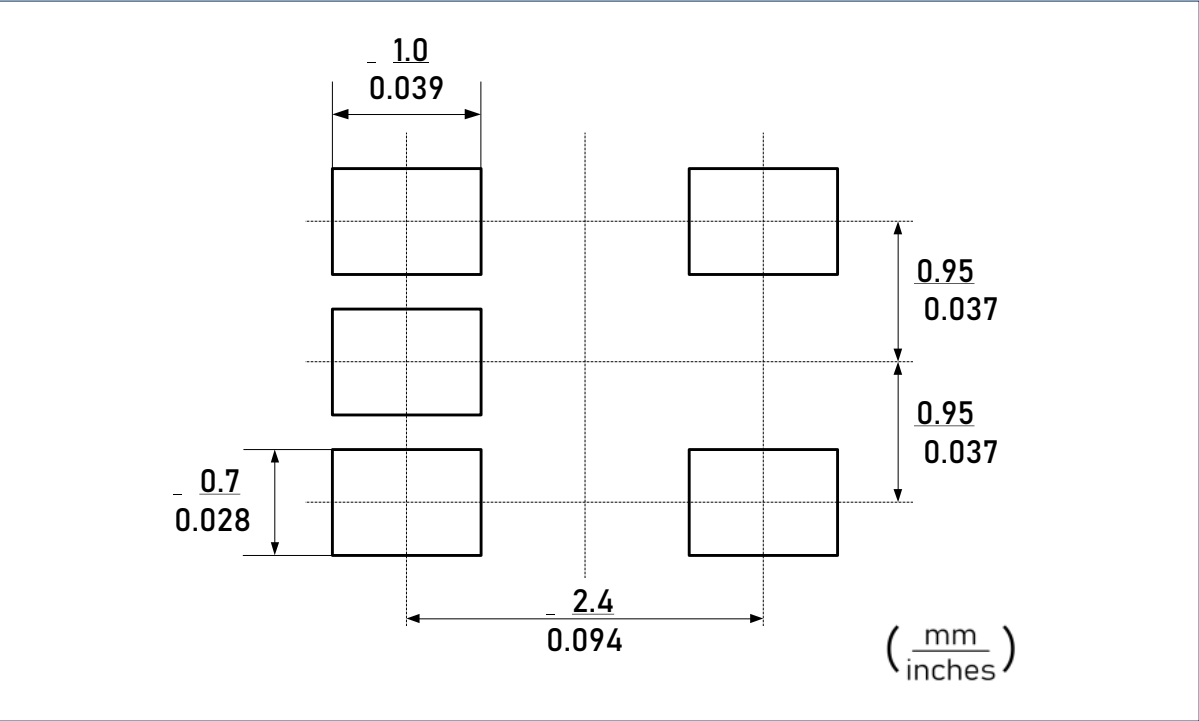


Package Outlines (Cont.)

DIMENSIONS, SOIC-8L

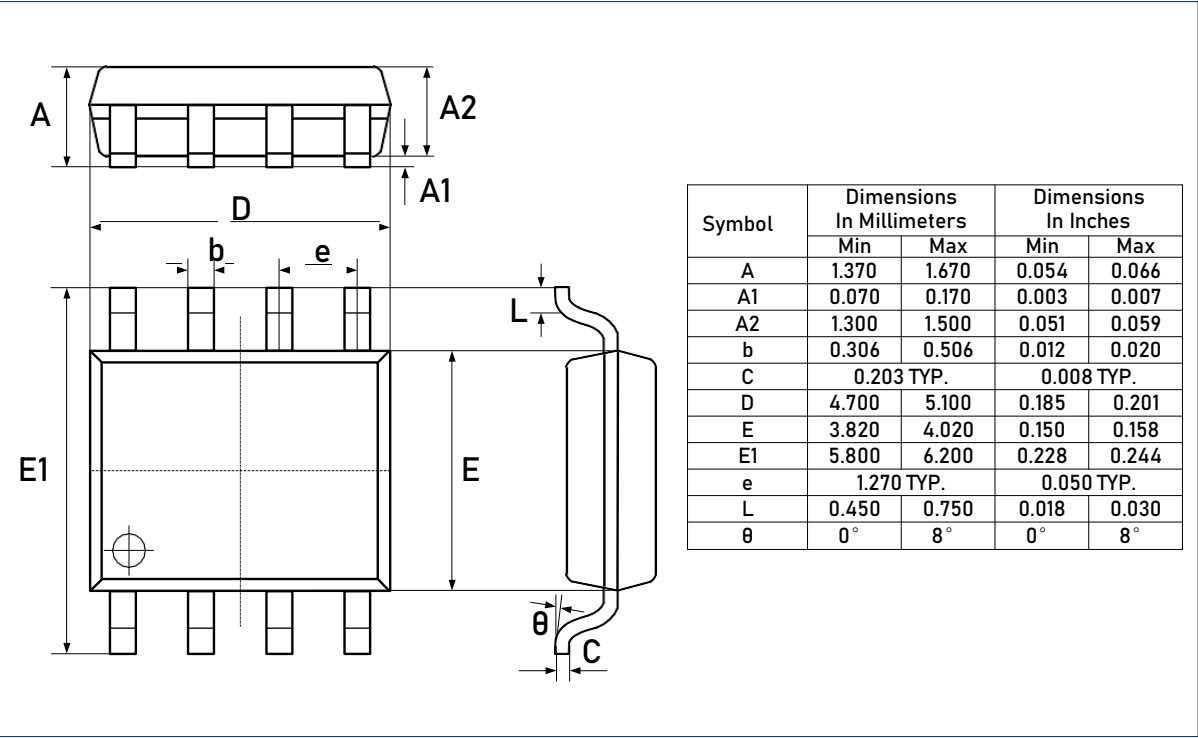


RECOMMENDED SOLDERING FOOTPRINT, SOIC-8L

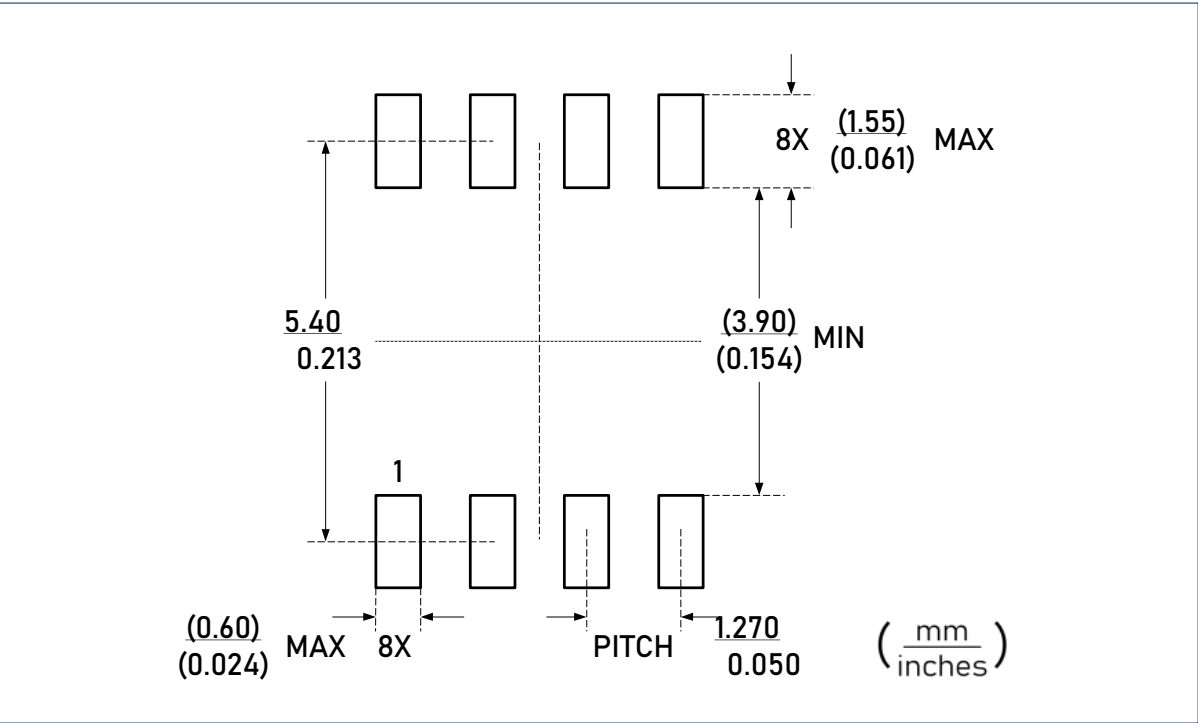


Package Outlines (Cont.)

DIMENSIONS, MSOP-8L

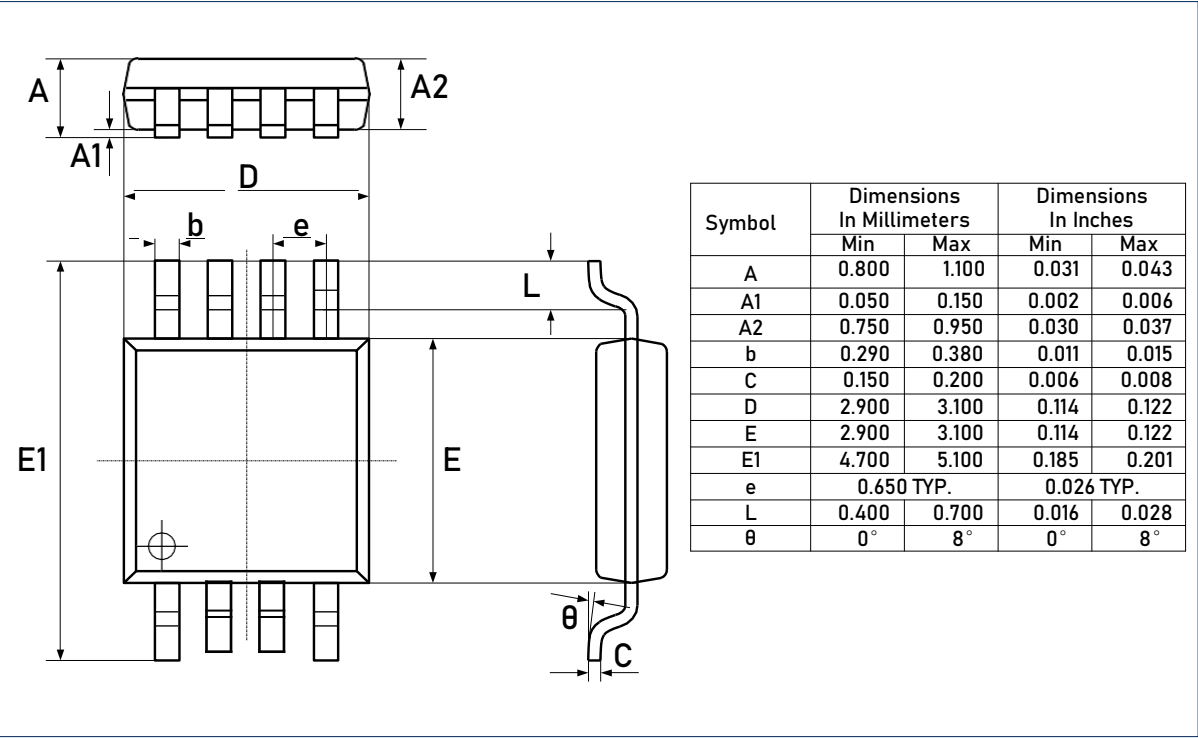

RECOMMENDED SOLDERING FOOTPRINT, MSOP-8L

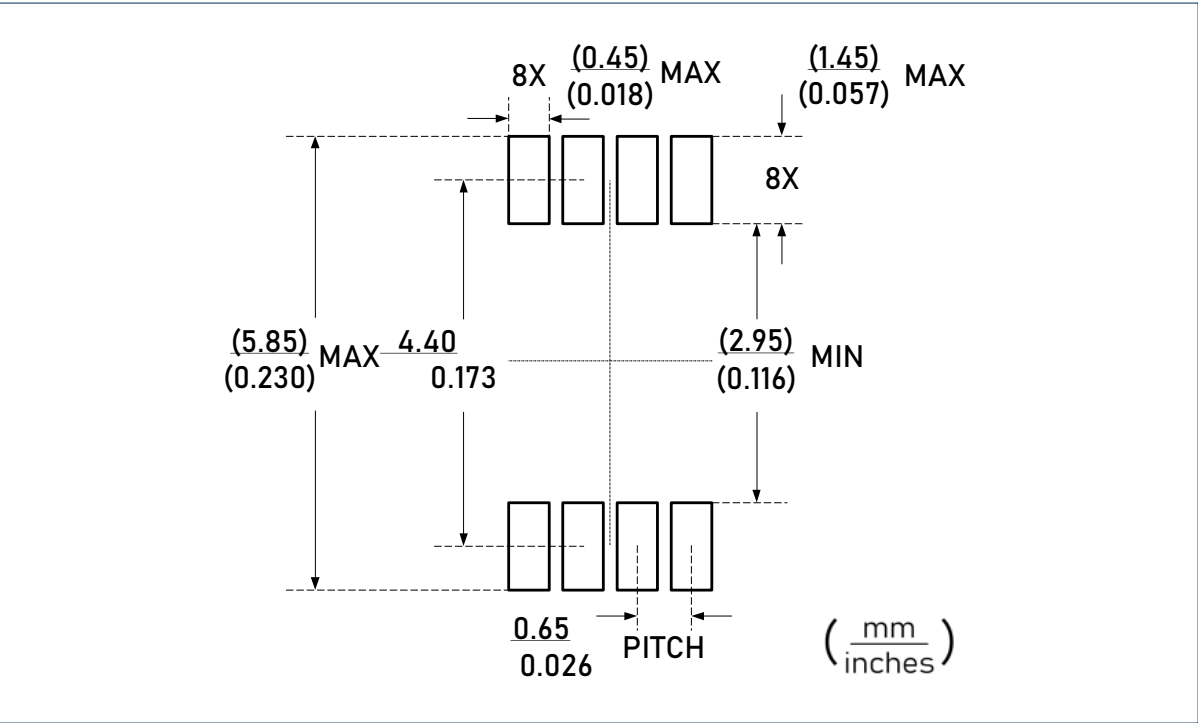

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
Linearin and designs are registered trademarks of Linearin Technology Corporation.
© Copyright Linearin Technology Corporation. All Rights Reserved.
All other trademarks mentioned are the property of their respective owners.


P-13

LTA6041, LTA6042, LTA6044


100 MHz, 60mA Rail-to-Rail Output, Low Power CMOS Amplifiers

Package Outlines (Cont.)

DIMENSIONS, TSSOP-8L

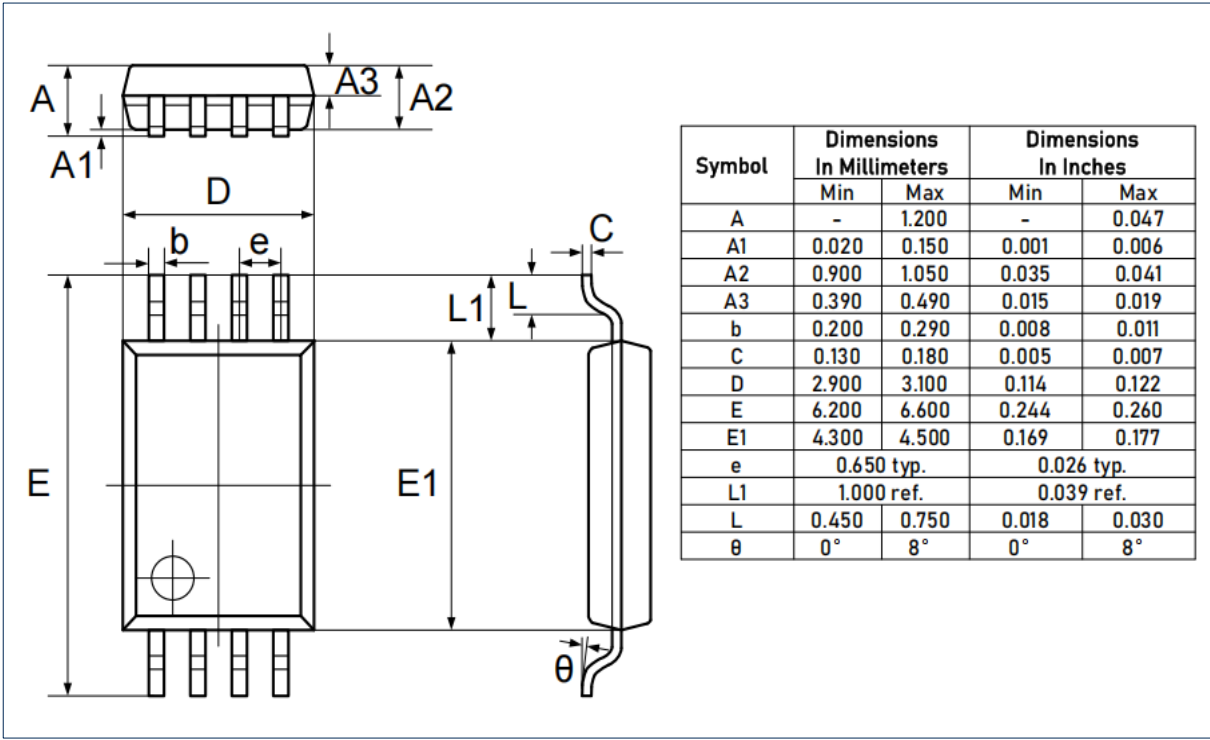

RECOMMENDED SOLDERING FOOTPRINT, TSSOP-8L

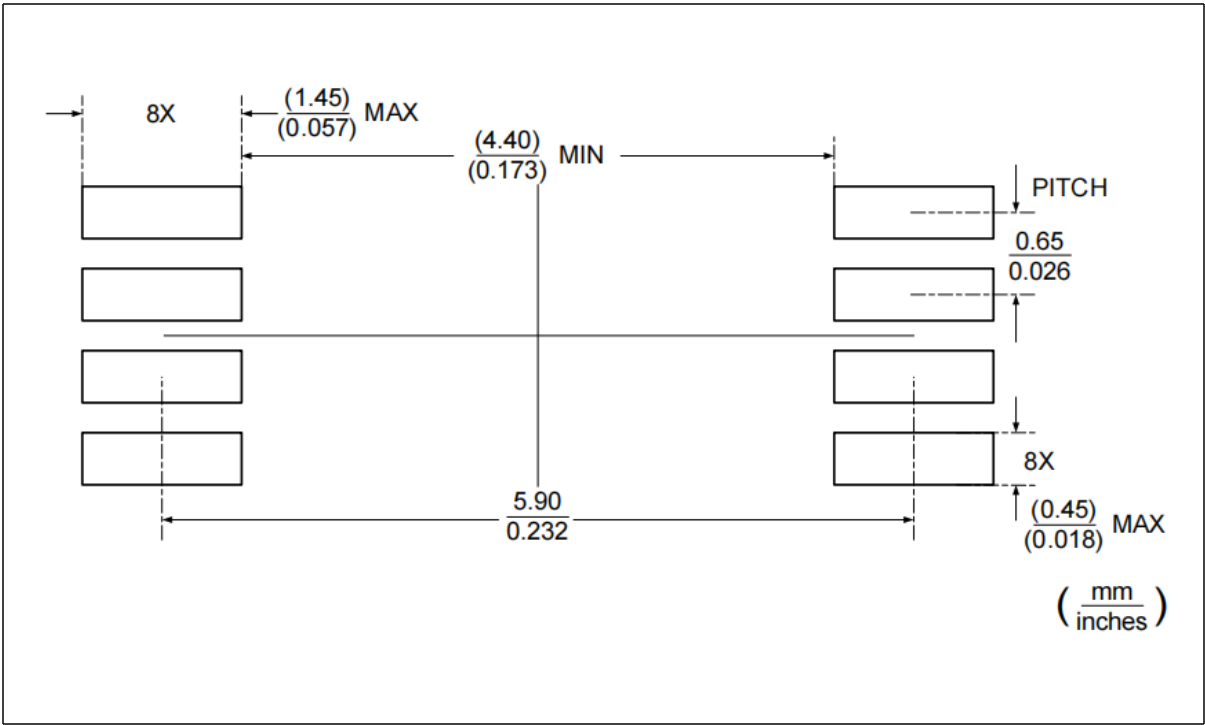


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
Linearin and designs are registered trademarks of Linearin Technology Corporation.
© Copyright Linearin Technology Corporation. All Rights Reserved.
All other trademarks mentioned are the property of their respective owners.




Package Outlines (Cont.)

DIMENSIONS, SOIC-14L

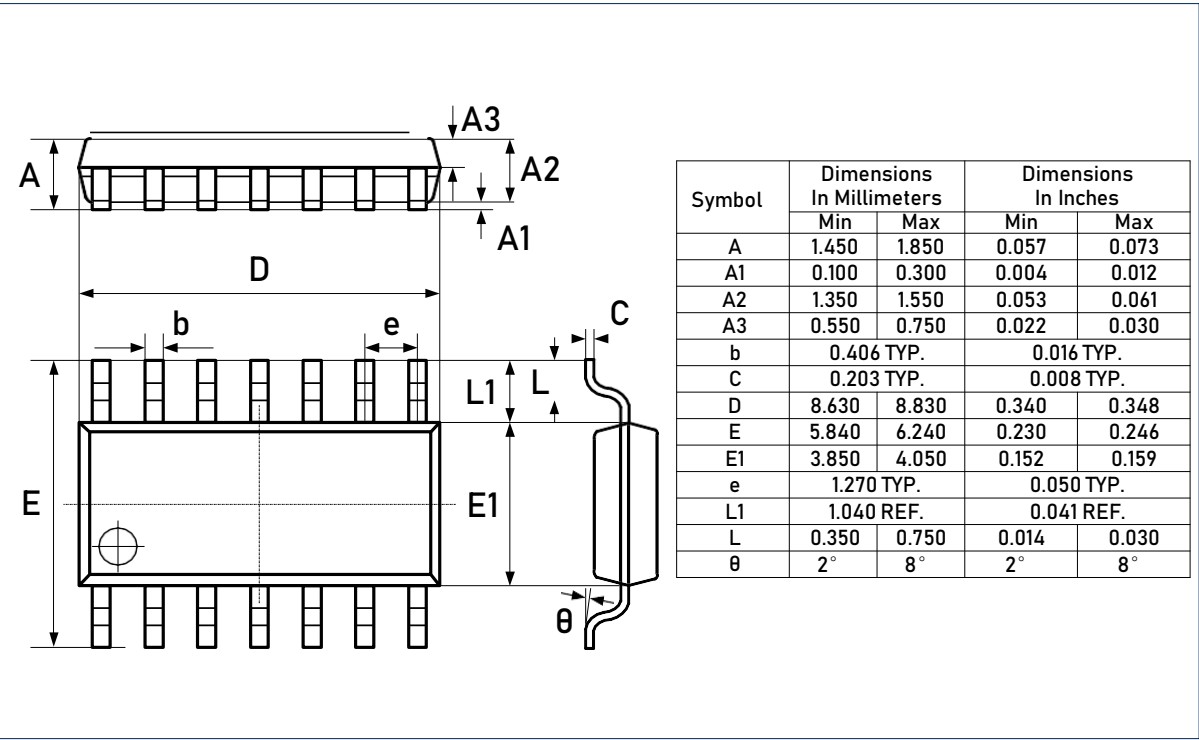


RECOMMENDED SOLDERING FOOTPRINT, SOIC-14L

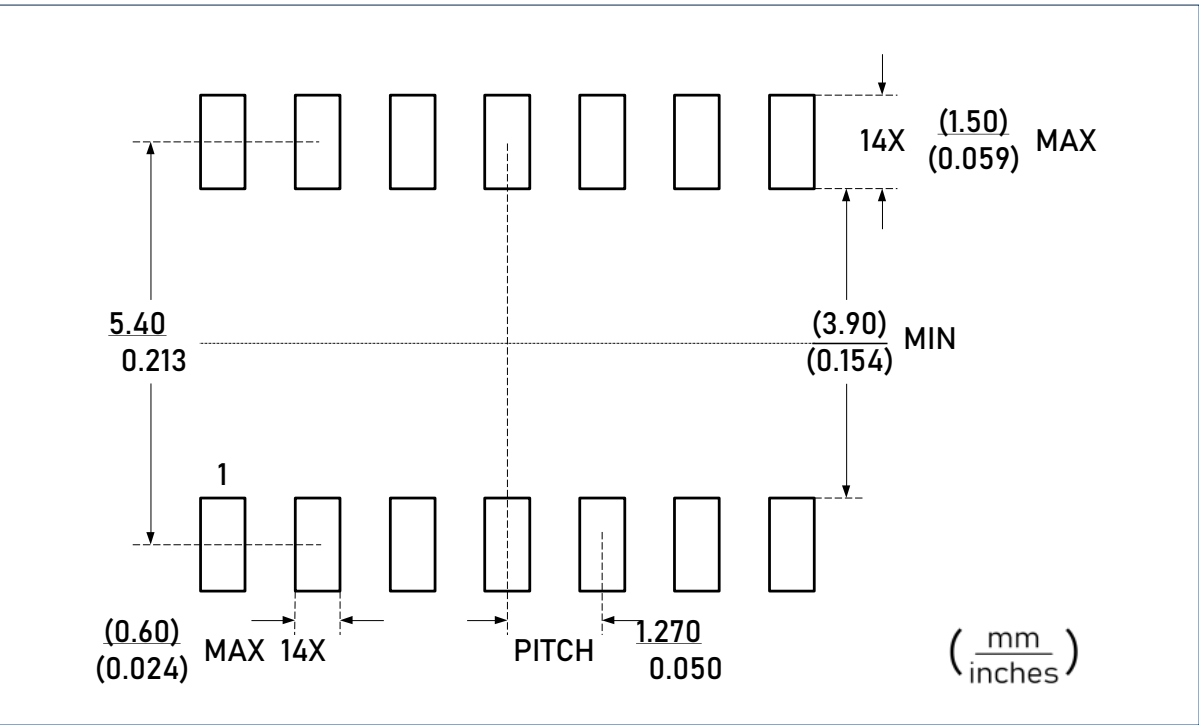


CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
Linearin and designs are registered trademarks of Linearin Technology Corporation.
© Copyright Linearin Technology Corporation. All Rights Reserved.
All other trademarks mentioned are the property of their respective owners.

Package Outlines (Cont.)

DIMENSIONS, TSSOP-14L

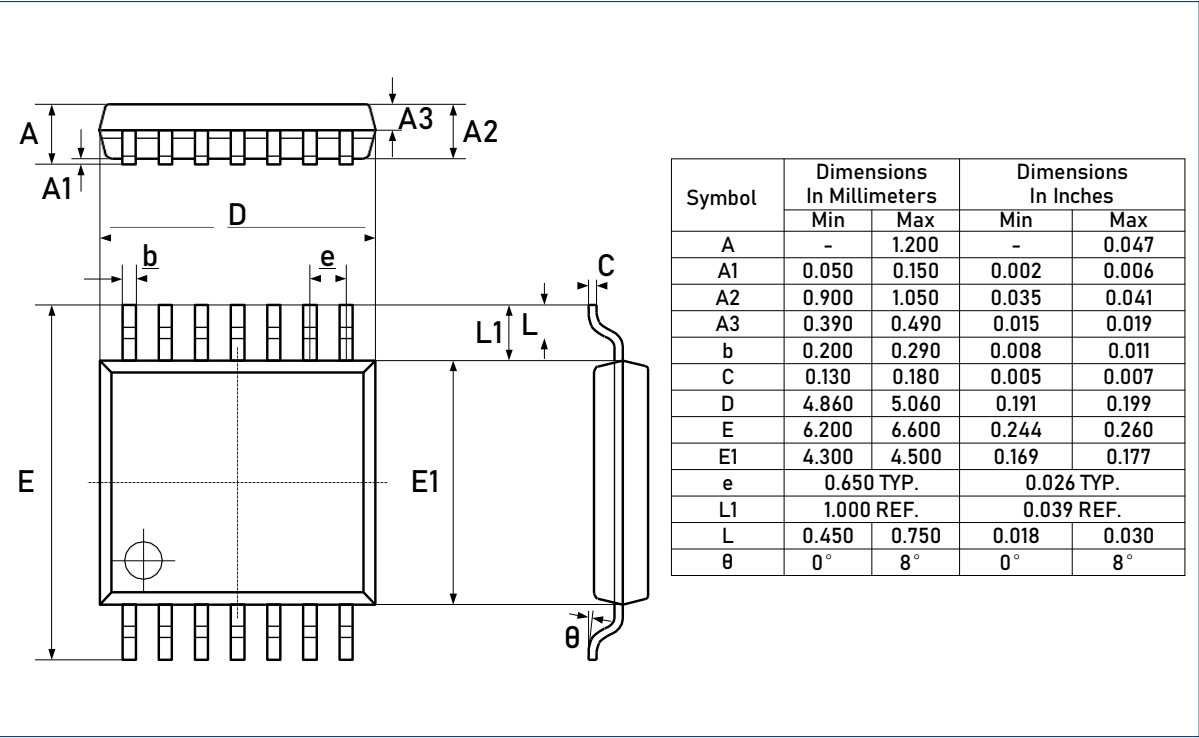

RECOMMENDED SOLDERING FOOTPRINT, TSSOP-14L

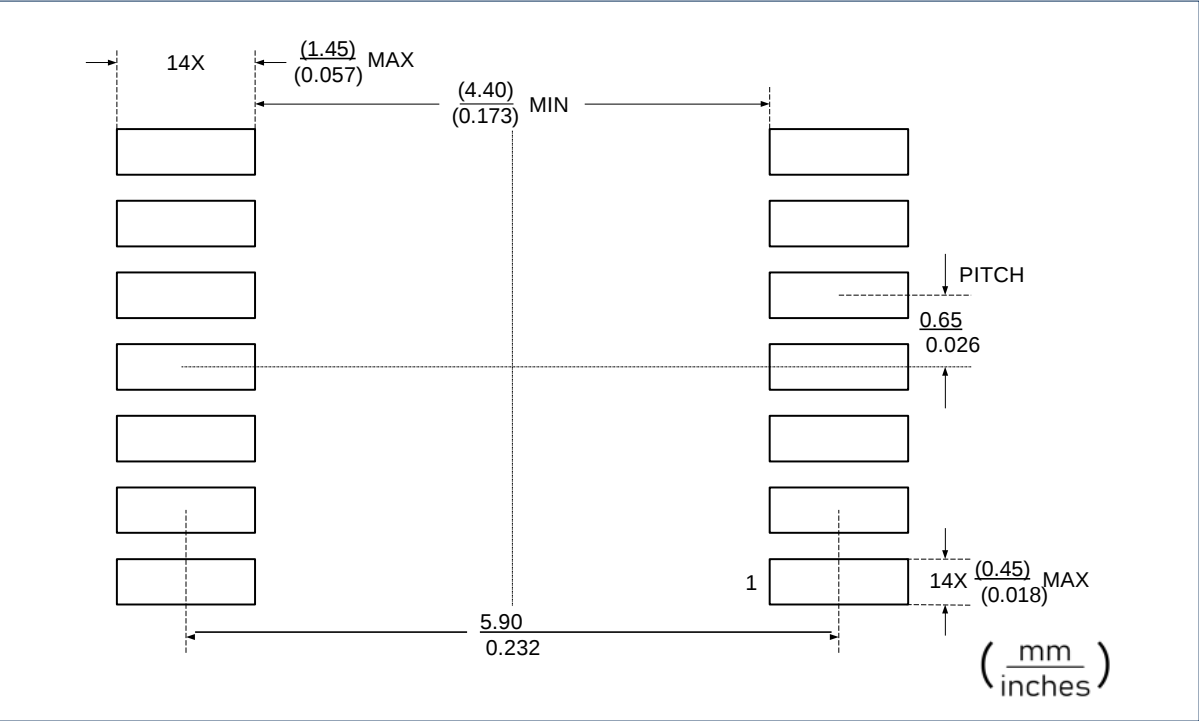

Important Notice

Linearin is a global fabless semiconductor company specializing in advanced high-performance high-quality analog/mixed-signal IC products and sensor solutions. The company is devoted to the innovation of high performance, analog-intensive sensor front-end products and modular sensor solutions, applied in multi-market of medical & wearable devices, smart home, sensing of IoT, intelligent industrial & smart factory (industry 4.0), and automotives. Linearin's product families include widely-used standard catalog products, solution-based application specific standard products (ASSPs) and sensor modules that help customers achieve faster time-to-market products. Go to <http://www.linearin.com> for a complete list of Linearin product families.

For additional product information, or full datasheet, please contact with the Linearin's Sales Department or Representatives.