

General Description


The LTR33 series devices are low temperature drift (20ppm/°C maximum), low-power, high-precision CMOS voltage reference, featuring $\pm 0.1\%$ initial accuracy, low operating current with power consumption less than 500 μ A. This device also offers very low output noise of 15 μ V_{pp}/V, which enables its ability to maintain high signal integrity with high-resolution data converters in noise critical systems.

Packaged in the same SOT23-3L package, LTR33xx offers enhanced specifications and pin-to-pin replacement for REF33xx and LM4132. Stability and system reliability are further improved by the low output-voltage hysteresis of the device and low long-term output voltage drift. LTR33xx is specified for the wide temperature range of -40 to $+125$ °C.

Features and Benefits


- Voltage options: 1.25V, 1.5V, 2.048V, 2.5V, 3.0V, 3.3V, 4.096V
- Initial accuracy: $\pm 0.1\%$ (maximum)
- Low temperature coefficient: 20 ppm/°C (maximum)
- Output 1/f noise at 0.1 to 10 Hz: 15 μ V_{pp}/V
- Supply voltage: 2.7 to 5.5 V
- Power consumption: < 500 μ A
- Startup time: <400us
- Operating temperature: -40 to 125 °C
- Output Current: ± 5 mA

Pin Configuration



Applications

- Data acquisition (DAQ)
- PLC analog I/O modules
- Field transmitters
- Motor drive control module
- Battery test equipment
- LCR meters

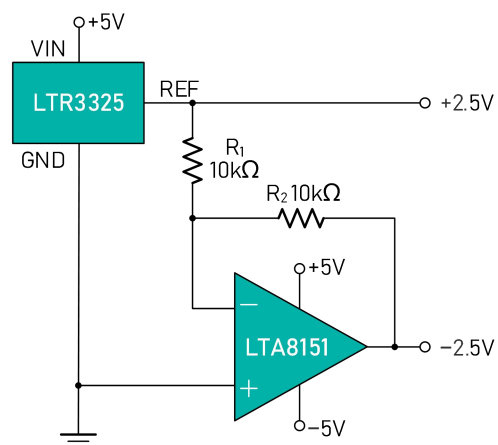

Pin Description

Pin. Name	Pin Description
VIN	Power supply voltage
GND	Ground.
REF	Reference voltage outputs , an external capacitor is required.

Ordering Information ⁽¹⁾

Type Number	Output Voltage	Quantity	Operating Temperature	Package Name	Marking Code
LTR3312T20YT3	1.25V	3000	–40 to 125 °C	SOT23-3L	3A
LTR3315T20YT3	1.5V	3000	–40 to 125 °C	SOT23-3L	3G
LTR3320T20YT3	2.048V	3000	–40 to 125 °C	SOT23-3L	3B
LTR3325T20YT3	2.5V	3000	–40 to 125 °C	SOT23-3L	3C
LTR3330T20YT3	3.0V	3000	–40 to 125 °C	SOT23-3L	3D
LTR3333T20YT3	3.3V	3000	–40 to 125 °C	SOT23-3L	3E
LTR3340T20YT3	4.096V	3000	–40 to 125 °C	SOT23-3L	3F

(1) Please contact to your Linearin representative for the latest availability information and product details.

Limiting Value – In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Absolute Maximum Rating
Operating Ambient Temperature Range	–40 to 125 °C
Storage Temperature Range	–50 to 125 °C
Input Voltage Range	–0.3 V to 5.5 V
ESD protection	> 3000 V

Note: Stresses exceeding those listed in the Maximum Rating table may damage the device. Operation beyond the maximum Rating conditions or under harsh conditions may affect product reliability and function.


Recommended Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{IN}	Supply input voltage	V _{OUT} +0.2		5.5	V
I _{CC}	Output current range	–5		5	mA

Electrical Characteristics

Symbol	Parameter	Description	Min.	Typ.	Max.	Unit
V_{IN}	Power supply voltage		2.7	5	5.5	V
I_{CC}	Power consumption	$V_{CC} = 5.0V$, no load.		300	500	μA
V_{OUT}	Output voltage	LTR3312		1.25		V
		LTR3315		1.5		V
		LTR3320		2.048		V
		LTR3325		2.5		V
		LTR3330		3.0		V
		LTR3333		3.3		V
		LTR3340		4.096		V
ΔV_{OUT}	Output voltage accuracy		-0.1		0.1	%
V_{noise}	Output Noise	0.1Hz~10Hz		15		$\mu V_{pp}/V$
T_C	Temperature coefficient	-40 to 125 °C			20	ppm/°C
$V_{IN}-V_{OUT}$	Dropout Voltage			200		mV
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation				100	ppm/V
$\Delta V_{OUT}/\Delta I_L$	Load Regulation				50	ppm/mA
dT	Thermal hysteresis			80		ppm
	Long-term stability	0h to 1000h at 25 °C		200		ppm
I_{SC}	Short-circuit current	Sourcing and sinking		50		mA
	Capacitive load		0.1		10	μF
	Turn-on setting time				400	us

Typical Application

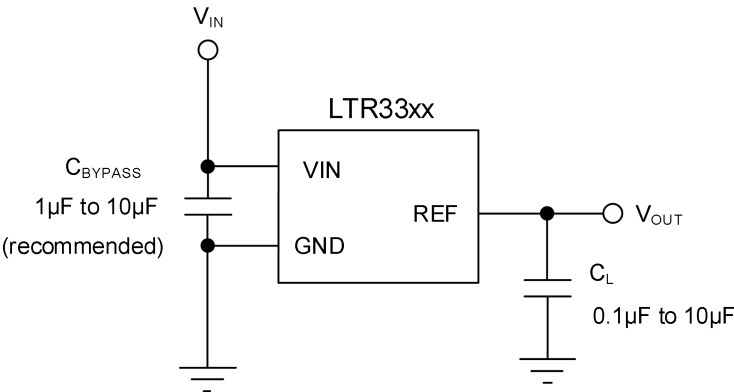

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
Linearin and designs are registered trademarks of Linearin Technology Corporation.
© Copyright Linearin Technology Corporation. All Rights Reserved.
All other trademarks mentioned are the property of their respective owners.

Layout

Layout Guidelines


For optimal performance of this design, please follow standard printed circuit board (PCB) layout guidelines, including proper decoupling close to all integrated circuits and adequate power and ground connections with large copper pours.

As shown below an example of a PCB layout for a data acquisition system using the LTR33xx.

Some key considerations are:


- Connect a low-ESR, $1\mu\text{F}$ ceramic capacitor at the IN pin for bypass, and a $0.1\mu\text{F}$ to $10\mu\text{F}$ ceramic capacitor at the OUT pin for stability of the LTR33xx.
- Decouple other active devices in the system per the device specifications.
- Use a solid ground plane helps distribute heat and reduces EMI noise pickup.
- Place the external components as close to the device as possible. This configuration prevents parasitic errors (such as the Seebeck effect) from occurring.
- Minimize trace length between the reference and bias connections to the ADC to reduce noise pickup.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when absolutely necessary.

Layout Example

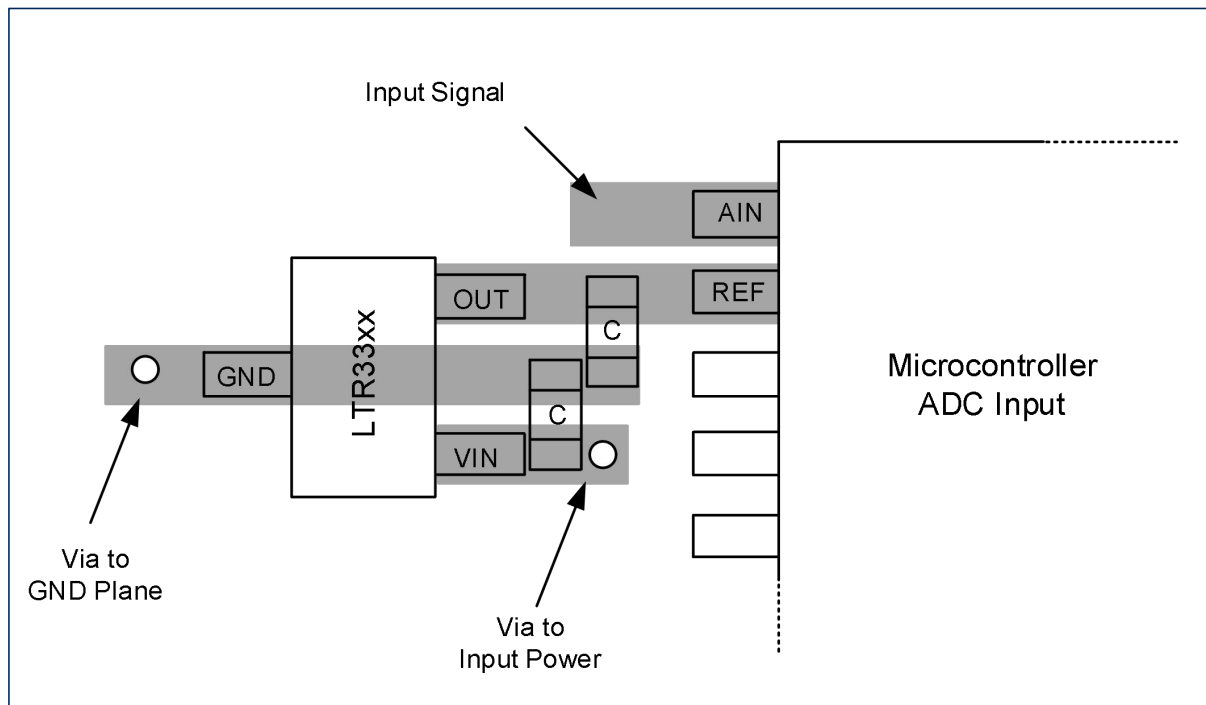


Tape and Reel Information

REEL DIMENSIONS

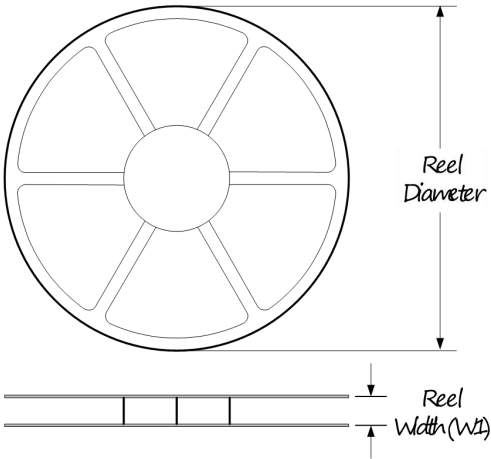


TAPE DIMENSIONS

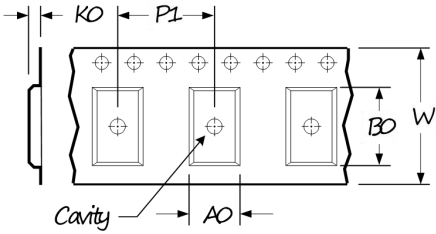

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

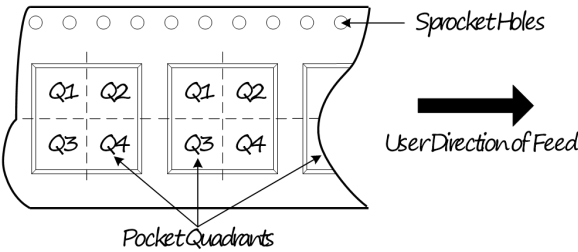


* All dimensions are nominal

Device	Package Type	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin 1 Quadrant
LTR33xxT20YT3	SOT23	3	3 000	178	9.5	3.2	3.2	1.4	4.0	8.0	Q3

Package Outlines

DIMENSIONS, SOT23-3L

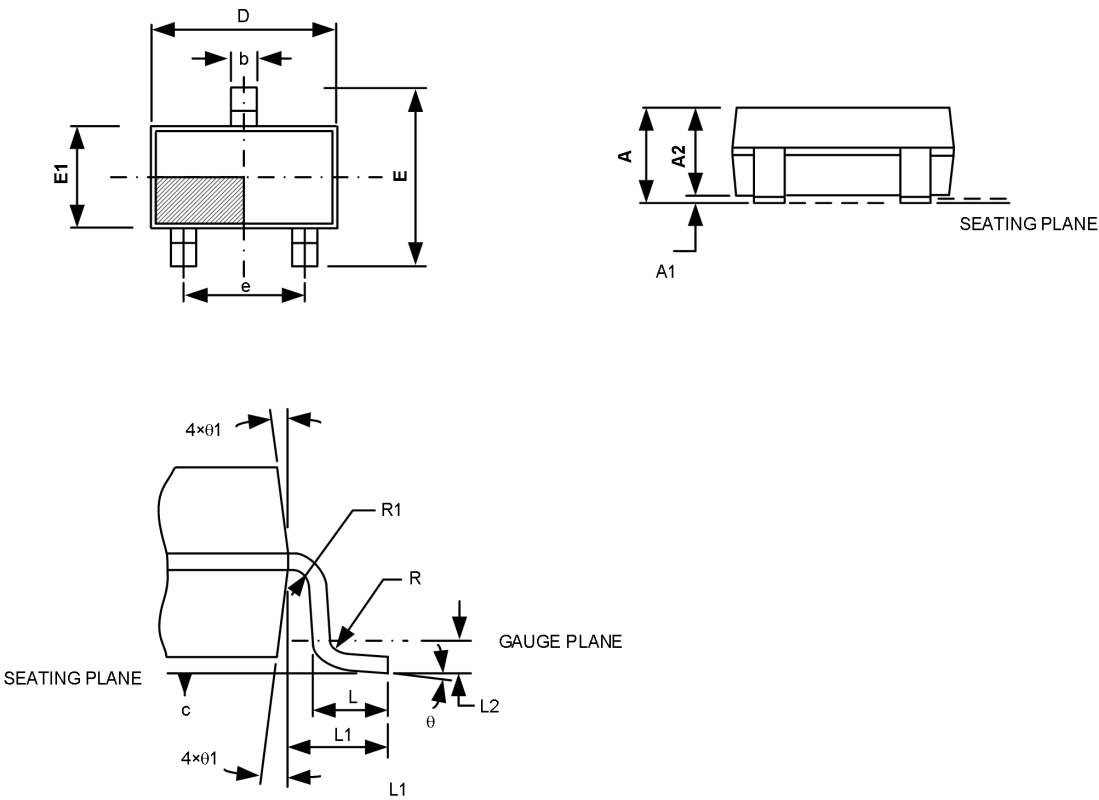

Symbol	Min.	Typ.	Max.
A	-	-	1.35
A1	0	-	0.15
A2	1.0	1.1	1.2
b	0.35	-	0.45
b1	0.32	-	0.38
C	0.14	-	0.20
C1	0.14	0.15	0.16
D	2.82	2.92	3.02
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	1.8	1.9	2.0
L	0.35	0.45	0.6
L1	0.6REF		
L2	0.25REF		
R	0.1	-	-
R1	0.1	-	0.25
θ	0°	4°	8°
θ1	5°	10°	15°

(Unit: mm)

Important Notices

Linearin is a global fabless semiconductor company specializing in advanced high-performance high-quality analog/mixed-signal IC products and sensor solutions. The company is devoted to the innovation of high performance, analog-intensive sensor front-end products and modular sensor solutions, applied in multi-market of medical & wearable devices, smart home, sensing of IoT, intelligent industrial & smart factory (industrial 4.0), and automotives. Linearin's product families include widely-used standard catalog products, solution-based application specific standard products (ASSPs) and sensor modules that help customers achieve faster time-to-market products. Go to <http://www.linearin.com> for a complete list of Linearin product families.

For additional product information, or full datasheet, please contact with the Linearin's Sales Department or Representatives.